




PRIMEGRIP



**FALL**  
**PROTECTION**  
PRODUCT GUIDE 2023

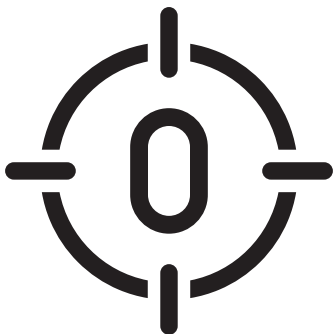

# **#TARGETZERO:***falls*


TO LEARN MORE GO TO [PRIMELINETOOLS.COM/TARGETZERO](https://www.primelinetools.com/targetzero)

---



Primeline Tools' goal is to set a target of zero injuries for workers at heights. We aim to achieve this by emphasizing education in safety protocols, the importance of exercising caution when working at heights and the use of safety equipment of the highest quality. At Primeline Tools, we pledge to do our part by making safety equipment we would recommend to our own families. By purchasing this Primegrip safety harness you are doing your part in bringing the number of jobsite accidents and injuries closer to zero.

---



# JUGGERNAUT TRU-VIS Utility Harness

- High strength 600D polyester webbing.
- EVA foam core padding throughout harness frame.
- Wrap-around waist strap.
- 2" overlaid utility belt for use with tool pouches.
- Convenient quick-connect chest and leg connections featuring green spot connection indicator.
- Quick-adjust vertical chest straps equipped with keeper loops to park your lanyard when not in use.
- Primegrip TRU-VIS reflective strips for visibility.
- Dual fall indicators.
- Available with or without tools bags.



NO BAGS

WITH BAGS

NO BAGS	WITH BAGS	±2" ±5 cm	MIN HARNES HEIGHT	MAX HARNES HEIGHT	MIN BELT LENGTH	MAX BELT LENGTH
23-040	23-046	S	34" 87 cm	40" 102 cm	28" 72 cm	42" 107 cm
23-041	23-047	M	36" 92 cm	42" 107 cm	32" 82 cm	47" 120 cm
23-042	23-048	L	38" 97 cm	44" 112 cm	32" 82 cm	47" 120 cm
23-043	23-049	L LONG	38" 97 cm	48" 122 cm	32" 82 cm	52" 133 cm
23-044	23-050	XL	41" 105 cm	54" 138 cm	40" 102 cm	63" 160 cm
23-045	23-051	XL LONG	44" 112 cm	61" 155 cm	47" 120 cm	63" 160 cm

NO BAGS MASTER QTY: 6  
WITH BAGS MASTER QTY: 5

# COLOSSUS TRU-VIS Utility Harness

- High strength 600D polyester webbing.
- EVA foam core padding throughout harness frame for outstanding comfort.
- Wrap-around waist strap.
- 2" overlaid utility belt for use with tool pouches.
- Convenient quick-connect chest and leg connections featuring green spot connection indicator.
- Quick-adjust vertical chest straps equipped with keeper loops to park your lanyard when not in use.
- Primegrip TRU-VIS reflective strips for visibility in the most dimly lit environments.
- Dual fall indicators.
- Available with or without tools bags.



**NO BAGS**

**WITH BAGS**

NO BAGS	WITH BAGS	±2" ±5 cm	MIN HARNESS HEIGHT	MAX HARNESS HEIGHT	MIN BELT LENGTH	MAX BELT LENGTH
23-052	23-054	L	38" 97 cm	44" 112 cm	32" 82 cm	47" 120 cm
23-053	23-055	XL	41" 105 cm	54" 138 cm	40" 102 cm	63" 160 cm

**NO BAGS MASTER QTY: 6**

**WITH BAGS MASTER QTY: 5**

# PALADIN TRU-VIS Support Harness



- High strength 600D polyester webbing.
- Porous fabric shoulder pad design.
- EVA foam core padding on shoulders and upper back.
- Ergonomic EVA foam-padded waist strap.
- 2" overlaid utility belt for use with tool pouches.
- Convenient quick-connect chest connection featuring green spot connection indicator.
- Quick adjust vertical chest straps equipped with keeper loops to park lanyard when not in use.
- Primegrip TRU-VIS reflective strips.
- Dual fall indicators.

	±2" ±5 cm	MIN HARNESS HEIGHT	MAX HARNESS HEIGHT	MIN BELT LENGTH	MAX BELT LENGTH
23-060	S	26" 67 cm	40" 102 cm	28" 72 cm	42" 107 cm
23-061	M	28" 72 cm	43" 110 cm	32" 82 cm	46" 117 cm
23-062	L	30" 77 cm	46" 117 cm	36" 92 cm	50" 127 cm
23-063	XL	32" 82 cm	50" 127 cm	40" 102 cm	52" 133 cm
23-064	XXL	34" 87 cm	57" 145 cm	44" 112 cm	58" 148 cm

MASTER QTY: 6



CSA CERTIFIED



CLASS A



CLASS P

# COMMANDER TRU-VIS Construction Harness

23-105



- High strength 600D polyester webbing.
- Removable shoulder pad can be washed.
- Padded waist strap with a 2" utility belt for pouches.
- Quick-connect chest and leg connections with green spot connection indicator.
- Quick-adjust vertical chest straps with keeper loops to park your lanyard when not in use.
- Primegrip TRU-VIS reflective strips.
- Size fits Medium – Large.

MASTER QTY: 15



CSA CERTIFIED



CLASS A



CLASS P

# CRUSADER TRU-VIS Comfort Harness

- Breathable and soft foam padding throughout harness frame and belt.
- 2" overlaid utility belt for use with tool pouches.
- Quick-adjust vertical chest straps equipped with keeper loops to park your lanyard when not in use.
- Wrap-around waist strap.
- Quick connect buckles on the leg and chest straps with green spot connection indicator.
- Primegrip TRU-VIS reflective strips for unrivaled visibility.
- Available in 3 sizes: Small, Medium-Large and Large-Extra Large, and with or without tool bags.



**NO BAGS**



**WITH BAGS**

NO BAGS	WITH BAGS	±2" ±5 cm	MIN HARNESS HEIGHT	MAX HARNESS HEIGHT	MIN BELT LENGTH	MAX BELT LENGTH
23-147	23-153	S	34" 87 cm	40" 102 cm	40" 102 cm	47" 120 cm
23-148	23-154	M-L	36" 92 cm	42" 107 cm	43" 109 cm	58" 148 cm
23-149	23-155	L-XL	41" 105 cm	53" 135 cm	47" 120 cm	63" 160 cm

**NO BAGS MASTER QTY: 8**

**WITH BAGS MASTER QTY: 1**

**23-101**  
**WARRIOR HARNESS**



- Extremely strong and durable 1¾" polyester webbing.
- 5 independent adjustment points.
- Back D-ring certified for fall arrest.
- Pass-through leg and chest connections.
- CSA Z259.10 certified, OSHA & ANSI compliant.
- Universal small – large size.



**MASTER QTY: 15**

**23-103**  
**GLADIATOR HARNESS WITH SIDE D-RINGS**



- Extremely strong and durable 1¾" polyester webbing.
- 5 independent adjustment points.
- Back D-ring certified for fall arrest.
- Class P compliant lateral D-rings for work positioning.
- Pass-through leg and chest connections.
- CSA Z259.10 certified, OSHA & ANSI compliant.
- Universal small – large size.



**MASTER QTY: 15**

**23-105**  
**RENEGADE HARNESS WITH GROMMET LEG STRAPS**



- Extremely strong and durable 1¾" polyester webbing.
- 5 independent adjustment points.
- Back D-ring certified for fall arrest.
- Grommet leg connections.
- Pass-through chest connection.
- CSA Z259.10 certified, OSHA & ANSI compliant.
- Universal small – large size.



**MASTER QTY: 15**

## 23-141

### 2-POCKET TOOL POUCH



- 9" deep pockets.
- Made from 600d polyester PVC-coated fabric.
- Hook and loop back for a secure fit.

MASTER QTY: 15

---

## 23-142

### 3-POCKET TOOL POUCH



- 9" deep pockets.
- Made from 600d polyester PVC-coated fabric.
- Hook and loop back for a secure fit.

MASTER QTY: 25

---

## 23-143

### HAMMER HOLDER



- Made from 600d polyester PVC-coated fabric.
- Hook and loop back for a secure fit.

MASTER QTY: 80



## 23-538

### HARNESS PAD



- Universal fit for any harness.
- Breathable nylon construction.
- Soft and comfortable closed-cell foam inside.
- Hook and loop with buttons for simple and secure fit.

MASTER QTY: 10

## 23-171

### 3' SHOCK-ABSORBING LANYARD



- Highly durable. Easy to inspect.
- Snap hook ends.
- User capacity 68.1 – 140 kg (150 – 310 lb).
- CSA Z259.11 certified and OSHA/ANSI compliant.



MASTER QTY: 10

## 23-172

### 6' SHOCK-ABSORBING LANYARD



- Highly durable. Easy to inspect.
- Snap hook ends.
- User capacity 68.1 – 140 kg (150 – 310 lb).
- CSA Z259.11 certified and OSHA/ANSI compliant.



MASTER QTY: 10

## 23-162

### DUAL HOOK SHOCK-ABSORBING LANYARD




- Built-in woven expanding core.
- Steel locking rebar hook and snap hook.
- Outer jacket that works as a back-up lanyard.
- Durable lightweight polyester materials.
- Warning flag that provides visual proof of a fall.
- CSA Z259.11 certified and OSHA/ANSI compliant.
- User capacity 100 – 254 lb.



MASTER QTY: 10

## 23-163

### 6' TWIN SHOCK ABSORBING LANYARD

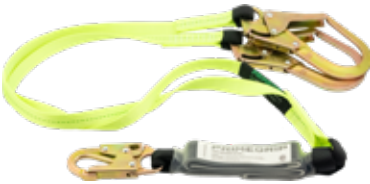

- Easy to inspect.
- Highly durable.
- One snaphook and two rebar hooks.
- User capacity 68.1 – 140 kg (150 – 310 lb).
- CSA Z259.11 certified And OSHA/ANSI Compliant.



MASTER QTY: 10

## 23-202

### ROPE GRAB WITH ABSORBER



- Double-locking closing mechanism.
- Hinge design permits attachment anywhere on lifeline.
- Large ring for direct web attachment or snaphook connection.
- Moves freely along rope on brass rollers.
- Features a 2' external shock pack.
- CSA Z259.11 certified and OSHA/ANSI compliant.



MASTER QTY: 10

## 23-513

### SELF-LOCKING CARABINER



- Heat-treated alloy steel.
- 100% proof loaded to 3,600 lb.
- Meets ANSI Z359.12, CSA Z259.12, EN 362.
- Minimum breaking load 5,000 lb.
- Gate strength 3,600 lb.



INNER QTY: 12 | MASTER QTY: 48

## 23-280

### 6' WEBBING SRL WITH SNAP HOOK, THERMOPLASTIC HOUSING



- Rugged thermoplastic housing, non-corrosive stainless steel components. Aramid fiber webbing with UHMWPE and polyester core.
- Quick-action braking system.
- Swivel top and side lifeline exit.
- Can be used with 23-520 and 23-521 connectors to create a multi-lifeline system.
- Self-locking snap hook.
- Designed to meet and exceed the requirements of ANSI Z359.14-2014 CLASS A SRL.

## 23-281

### 6' SRL WITH REBAR HOOK, THERMOPLASTIC HOUSING



- Rugged thermoplastic housing, non-corrosive stainless steel components. Aramid fiber webbing with UHMWPE and polyester core.
- Quick-action braking system.
- Swivel top and side lifeline exit.
- Can be used with 23-520 and 23-521 connectors to create a multi-lifeline system.
- Self-locking rebar hook.
- Designed to meet and exceed the requirements of ANSI Z359.14-2014 CLASS A SRL.

## 23-282

### 12' SRL WITH SNAP HOOK, THERMOPLASTIC HOUSING



- Rugged thermoplastic housing, non-corrosive stainless steel components. Aramid fiber webbing with UHMWPE and polyester core.
- Quick-action braking system.
- Swivel top and side lifeline exit.
- Can be used with 23-520 and 23-521 connectors to create a multi-lifeline system.
- Self-locking snap hook.
- Designed to meet and exceed the requirements of ANSI Z359.14-2014 CLASS A SRL.

## 23-285

### 30' CABLE SRL WITH SNAP HOOK, ALUMINUM HOUSING



- Rugged aluminum housing, non-corrosive stainless steel components and galvanized steel cable wire.
- Quick-action braking system.
- Swivel top and side lifeline exit.
- Internal energy absorption system.
- Self-locking snap hook.
- Designed to meet and exceed the requirements of ANSI Z359.14-2014 CLASS A SRL.

## 23-286

### 30' CABLE SRL WITH SNAP HOOK, THERMOPLASTIC HOUSING



- Rugged thermoplastic housing, non-corrosive stainless steel components and galvanized steel cable wire.
- Quick-action braking system.
- Swivel top.
- Rubber (TPV) ergonomic carry handle.
- Internal energy absorption system.
- Self-locking snap hook.
- Designed to meet and exceed the requirements of ANSI Z359.14-2014 CLASS A SRL.

### 23-287

#### 50' CABLE SRL WITH SNAP HOOK, THERMOPLASTIC HOUSING



- Rugged thermoplastic housing, non-corrosive stainless steel components and galvanized steel cable wire.
- Quick-action braking system.
- Swivel top.
- Side lifeline exit with integrated handle.
- Internal energy absorption system.
- Self-locking snap hook.
- Designed to meet and exceed the requirements of ANSI Z359.14-2014 CLASS A SRL.

INNER QTY: | MASTER QTY:

---

### 23-288

#### 65' CABLE SRL WITH SNAP HOOK, THERMOPLASTIC HOUSING



- Rugged thermoplastic housing, non-corrosive stainless steel components and galvanized steel cable wire.
- Quick-action braking system.
- Swivel top.
- Side lifeline exit with integrated handle.
- Internal energy absorption system.
- Self-locking snap hook.
- Designed to meet and exceed the requirements of ANSI Z359.14-2014 CLASS A SRL.

### 23-291

#### 30' SRL-LE WITH SNAP HOOK, ALUMINUM HOUSING



- Rugged aluminum housing, non-corrosive stainless steel components and galvanized steel cable wire.
- Quick-action braking system.
- Swivel top and side lifeline exit.
- Internal and external energy absorption system.
- Self-locking snap hook.
- Designed to meet and exceed the requirements of ANSI Z359.14-2014 CLASS A SRL

### **23-292**

#### **33' SRL-LE WITH SNAP HOOK, THERMOPLASTIC HOUSING**



- Rugged thermo-plastic housing, non-corrosive stainless steel components and galvanized steel cable wire.
- Quick-action braking system.
- Swivel top with rubber (TPV) ergonomic handle.
- Internal and external energy absorption system.
- Self-locking snap hook.
- Designed to meet and exceed the requirements of ANSI Z359.14-2014 CLASS A SRL

---

### **23-293**

#### **50' SRL-LE WITH SNAP HOOK, THERMOPLASTIC HOUSING**



- Rugged thermo-plastic housing, non-corrosive stainless steel components and galvanized steel cable wire.
- Quick-action braking system.
- Swivel top.
- Side lifeline exit with integrated handle.
- Internal and external energy absorption system.
- Self-locking snap hook.
- Designed to meet and exceed the requirements of ANSI Z359.14-2014 CLASS A SRL

---

### **23-294**

#### **65' SRL-LE WITH SNAP HOOK, THERMOPLASTIC HOUSING**



- Rugged thermo-plastic housing, non-corrosive stainless steel components and galvanized steel cable wire.
- Quick-action braking system.
- Swivel top.
- Side lifeline exit with integrated handle.
- Internal and external energy absorption system.
- Self-locking snap hook.
- Designed to meet and exceed the requirements of ANSI Z359.14-2014 CLASS A SRL

## 23-290

### TWIN CABLE LEADING EDGE SRL, THERMOPLASTIC HOUSING



- Rugged thermoplastic housing, non-corrosive stainless steel components and galvanized steel wire cable.
- Quick-action braking system.
- Swivel top and side lifeline exit.
- Direct attachment to harness using connector bracket.
- Backpack style energy absorber.
- Self-locking rebar hooks.
- Designed to meet and exceed the requirements of ANSI Z359.14-2014 CLASS A SRL

## 23-520

### DUAL LOCK TWIST RELEASE SRL BRACKET



## 23-521

### SCREW TYPE SRL CONNECTOR



## 23-413

### REUSABLE ANCHOR



- 14 Gauge reusable steel anchor with clear chromate finish.
- Meets OSHA 1926.502(d)(16)(v) requirements.
- Must be used only with approved components that limit the fall arresting forces to 900 lb or less.
- Support structure at anchor site must be capable of supporting a 5,000 lb static load.

MASTER QTY: 30

### 23-415

#### SINGLE PLATE HEAVY DUTY ANCHOR



- Compatible with both wood and steel substrates.
- Special hole configuration for a safer and more convenient installation of fasteners.
- Can be installed with screws or duplex nails.
- Fits up to 12/12 roof pitch.
- Fasteners provided.

INNER QTY: 3 | MASTER QTY: 18

---

### 23-416

#### DUAL PLATE HEAVY DUTY ANCHOR



- Compatible with both wood and steel substrates.
- Special hole configuration for a safer and more convenient installation of fasteners.
- Can be installed with screws or duplex nails.
- Fits up to 12/12 roof pitch.
- Fasteners provided.

MASTER QTY: 10

---

### 23-417

#### SINGLE RING RETROFIT ANCHOR



- Works with vented & non-vented ridge caps.
- Perfect for asphalt, wood & metal roofs.
- Butyl strip flashing included.
- Low profile design can be painted to match roof.
- Complies with all OSHA and ANSI standards.
- Includes stainless steel fasteners.

MASTER QTY: 20



## 23-418

### DOUBLE RING RETROFIT ANCHOR



- Works with vented & non-vented ridge caps.
- Perfect for asphalt, wood & metal roofs.
- Butyl strip flashing included.
- Low profile design can be painted to match roof.
- Complies with all OSHA and ANSI standards.
- Includes stainless steel fasteners.

**MASTER QTY: 20**

---

## 23-406

### 7¾" SINGLE D-RING RETROFIT ANCHOR



- Works with vented and non-vented ridge caps, ideal for use on hip corners, ridgelines, shed roofs and other non-standard areas.
- Perfect for asphalt, wood and metal roofs. The low profile design can be painted to match the roof.
- Stainless steel fasteners and butyl strip flashing included.
- Rated for one person in fall arrest or fall restraint with a maximum combined weight of 310 lb (140 kg).
- Designed to meet or exceed CSA, OSHA and ANSI standards.

**MASTER QTY: 20**

---

## 23-426

### 2x4 CLAW TYPE ANCHOR KIT



- Permanent anchor point to be installed on 2x4 framing members.
- 430 stainless steel 11 gauge body with a minimum tensile strength of 5,000 lb (22.5 kN).
- 100% waterproof with PVC flashing system and cover cap for stem included.
- Rated for one person in fall arrest or fall restraint with a maximum weight of 340 lb (154 kg).
- Designed to meet or exceed CSA, OSHA and ANSI standards.

**MASTER QTY: 20**

### **23-607**

#### **3' CONCRETE ANCHOR STRAP**



- Easy to install. Lightweight and durable.
- Manufactured from polyester and galvanized steel.
- Sheathed in heavy duty nylon webbing.
- Compatible with horizontal lifelines.

**MASTER QTY: 30**

---

### **23-608**

#### **4' CONCRETE ANCHOR STRAP**



- Easy to install. Lightweight and durable.
- Manufactured from polyester and galvanized steel.
- Sheathed in heavy duty nylon webbing.
- Compatible with horizontal lifelines.

**MASTER QTY: 30**

---

### **23-609**

#### **6' CONCRETE ANCHOR STRAP**



- Easy to install. Lightweight and durable.
- Manufactured from polyester and galvanized steel.
- Sheathed in heavy duty nylon webbing.
- Compatible with horizontal lifelines.

**MASTER QTY: 20**

### **23-610**

#### **6' CONCRETE ANCHOR STRAP SINGLE D-RING**



- Easy to install. Lightweight and durable.
- Manufactured from polyester and galvanized steel.
- Sheathed in heavy duty nylon webbing.
- Compatible with horizontal lifelines.

**MASTER QTY: 15**

---

### **23-614**

#### **6' CONCRETE ANCHOR STRAP DOUBLE D-RING**



- Easy to install. Lightweight and durable.
- Manufactured from polyester and galvanized steel.
- Sheathed in heavy duty nylon webbing.
- Compatible with horizontal lifelines.

**MASTER QTY: 20**

---

### **23-611**

#### **3' PREMIUM CROSS ARM STRAP**



- Easy to install.
- Lightweight and durable.
- Manufactured from polyester and galvanized steel with reinforced webbing for superior durability and functionality compared to standard models.

**MASTER QTY: 20**

## 23-612

### 4' PREMIUM CROSS ARM STRAP



- Easy to install.
- Lightweight and durable.
- Manufactured from polyester and galvanized steel with reinforced webbing for superior durability and functionality compared to standard models.

**MASTER QTY: 20**

---

## 23-613

### 6' PREMIUM CROSS ARM STRAP



- Easy to install.
- Lightweight and durable.
- Manufactured from polyester and galvanized steel with reinforced webbing for superior durability and functionality compared to standard models.

**MASTER QTY: 20**

---

## 23-602

### 3'x2" WEBSTRAP SLING



- Strong and durable 2-ply high strength webbing.
- Lightweight, portable, highly resistant to abrasion.
- 5,000 lb fall arrest anchor for one user.

**INNER QTY: 10 | MASTER QTY: 50**

**23-254****25' SINGLE HOOK LIFELINE**

- Aluminum swage eye splice (3,600 lb gate strength and double locking snaphook) with adhesive PVC cover.
- Resists UV exposure, abrasion and water absorption.
- Can be used with mechanical and Prussic rope grabs.
- CSA Z259.2.5 certified and compliant with OSHA and ANSI standards.
- Rated for 10,582 lb.

**MASTER QTY: 6****23-255****30' SINGLE HOOK LIFELINE**

- Aluminum swage eye splice (3,600 lb gate strength and double locking snaphook) with adhesive PVC cover.
- Resists UV exposure, abrasion and water absorption.
- Can be used with mechanical and Prussic rope grabs.
- CSA Z259.2.5 certified and compliant with OSHA and ANSI standards.
- Rated for 10,582 lb.

**MASTER QTY: 6****23-263****50' SINGLE HOOK LIFELINE**

- Aluminum swage eye splice (3,600 lb gate strength and double locking snaphook) with adhesive PVC cover.
- Resists UV exposure, abrasion and water absorption.
- Can be used with mechanical and Prussic rope grabs.
- CSA Z259.2.5 certified and compliant with OSHA and ANSI standards.
- Rated for 10,582 lb.

**MASTER QTY: 4**

## 23-264

### 100' SINGLE HOOK LIFELINE



- Aluminum swage eye splice (3,600 lb gate strength and double locking snaphook) with adhesive PVC cover.
- Resists UV exposure, abrasion and water absorption.
- Can be used with mechanical and Prussic rope grabs.
- CSA Z259.2.5 certified and compliant with OSHA and ANSI standards.
- Rated for 10,582 lb.



MASTER QTY: 2

## 23-440

### 25' FALL PROTECTION KIT



- 23-101 Warrior 5 Adjustment Point Harness—Class A, CSA Z259.10 certified, OSHA and ANSI compliant.
- 23-202 Rope Grab with Shock Absorbing Lanyard—for use with 5/8" rope, 2' external shock pack, CSA Z259.11 certified and OSHA/ANSI compliant.
- 23-413 Reusable Roof Anchor—dual plate variable pitch design, stainless steel construction, 310 lb single-person capacity.
- 25' Single Hook Lifeline—3-strand rope, 3,600 lb snap hook gate strength, CSA Z259.2.5 certified, OSHA and ANSI compliant.
- 5 gallon storage pail.

## 23-450

### 50' FALL PROTECTION KIT



- 23-101 Warrior 5 Adjustment Point Harness—Class A, CSA Z259.10 certified, OSHA and ANSI compliant.
- 23-202 Rope Grab with Shock Absorbing Lanyard—for use with 5/8" rope, 2' external shock pack, CSA Z259.11 certified and OSHA/ANSI compliant.
- 23-413 Reusable Roof Anchor—dual plate variable pitch design, stainless steel construction, 310 lb single-person capacity.
- 50' Single Hook Lifeline—3-strand rope, 3,600 lb snap hook gate strength, CSA Z259.2.5 certified, OSHA and ANSI compliant.
- 5 gallon storage pail.

# BUILT BATTLE STRONG.™



3170 Orlando Dr. Unit 1,  
Mississauga, ON L4V 1R5, Canada

**T:** (905) 671-4788

**F:** (905) 672-5499

[INFO@PRIMELINETOOLS.COM](mailto:INFO@PRIMELINETOOLS.COM)  
[PRIMEGRIP.CA](http://PRIMEGRIP.CA)



312 W 2nd St. Unit A1311,  
Casper, WY 82601, USA

**T:** 1 (833) 770-4747

**F:** (905) 672-5499

[INFO@PRIMEGRIP.COM](mailto:INFO@PRIMEGRIP.COM)  
[PRIMEGRIP.COM](http://PRIMEGRIP.COM)