





Since 1985, Primeline Tools has been providing skilled professionals in the roofing, siding, HVAC, electrical, automotive and construction trades the best equipment for their projects. As a family owned and operated business, we take great pride in our continuous innovation, competitive pricing and uncompromising quality.

Our Primegrip division is a pioneering manufacturer of a wide range of tools for the roofing and siding industry. We have aimed to set the standards of excellence in the market for more than 35 years and continue to do so. Our dedication to maintaining our core values has elevated the Primegrip brand of products from humble beginnings to the forefront of the industry.



CONTENTS

RESIDENTIAL ROOFING

- BRACKETS & LADDER ACCESSORIES
- CHIMNEY CAPS
- CUTTING
- HAMMERS & HATCHETS
- **MAGNET BROOMS**
- **TEAR-OFF & REPAIR**

COMMERCIAL ROOFING

- 24 ASPHALT TOOLS
- **77** CUTTING
- **DRAIN ACCESSORIES**
- HEAT GUNS & ACCESSORIES
- ROLLERS
- MOD BIT TOOLS
- TEAR-OFF & REPAIR

METAL & SIDING

- BENDERS
- SNIPS & SHEARS
- SIDING

SLATE ROOFING

SLATE ROOFING

SAFETY & PPE

- **ANCHORS**
- **HARNESSES**
- **7** LANYARDS & CONNECTORS
- 77 LIFELINES
- FALL PROTECTION KITS
- PERSONAL PROTECTION
- **KNEE PADS**
- WORK GLOVES
- SUPPORT BELTS
- TIE DOWNS
- TOOL SAFETY
- SAFETY JACKETS

INDUSTRIAL TOOLS

- AIR HOSES & FITTINGS
- CAULKING GUNS
- 116 CUTTING
- **117** EXTENSION CORDS
- **117** MEASURING & MARKING
- **119** PAINTING TOOLS
- POUCHES & TOOL HOLDERS
- 126 DRIVERS & BIT HOLDERS
- **126** TAPES
- 127 TARPS















At Primegrip we believe that the roof is the most essential part of your house. It provides shade on a hot day. It keeps your home dry during rainstorms. It provides shelter from winds. In other words, your home is not a home without a solid roof over your head. Our residential roofing tool assortment is focused on making the job easier for the people who work day in and day out to build and repair our roofs.


BRACKETS HATCHETS

KNIVES & BLADES CHIMNEY CAPS

MAGNET BROOMS RIPPERS

ROOFING BRACKETS

The best and most economical solution for applications where consistent roof pitches and roof elevations are frequently encountered.

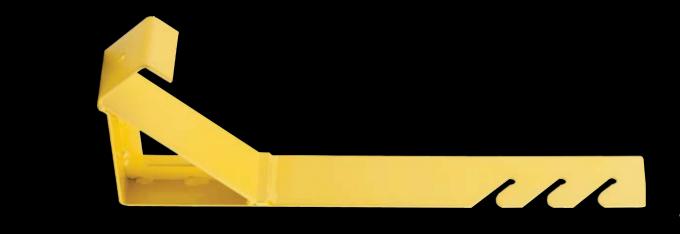

73-321





73-326

73-334

FEATURES

- Centrally welded steel ribbing plate with heavy duty welds makes for a stronger roof bracket.
- Provides a built-in cord and hose management system that helps prevent accidental tripping or falling on roof decks.
- Made from 1/8" steel with a double-welded base plate fulcrum and reinforced ribbing that eliminate flexing under excessive loads.
- Steel plate welded in to the load bearing fulcrum of each bracket dramatically improves the strength and durability.
- Bench tested to support 2,000 lb of load.

PART#	PRODUCT NAME
73-321	2"×6" ROOFING BRACKET—45°
73-322	2"×6" ROOFING BRACKET—60°
73-325	2"×10" ROOFING BRACKET—45°
73-326	2"×10" ROOFING BRACKET—60°
73-334	2"×6" ROOFING BRACKET—90°

PROVIDES A BUILT-IN CORD AND HOSE MANAGEMENT SYSTEM

ADJUSTABLE ROOF BRACKET

User-friendly roof bracket that is adjustable to fit multiple roof pitches and planks of varying sizes.



73-335

LADDER HOOK WITH WHEEL

Durable and convenient ladder hook with wheel.



73-338

FEATURES

- Adjusts to 33°, 45°, 60° and 90° angles to fit multiple pitches.
- Can be used with 2"×6", 2"×8" or 2"×10" planks and can also be used with 2"×2" planks at 33° and 45°.
- Features a nail hole in step to secure the plank, four long slots for added safety and convenience, a rib in the stem to eliminate flexing, and a flat heel.
- Can be used as a standard roof bracket or for commercial applications as a slide guide.

FEATURES

- Adjusts to fit between the top two ladder rungs.
- Compatible with wood, fiberglass, or aluminum ladders.
- Compatible with round or d-rung styles.
- Two hooks must be used per ladder.

LADDER STABILIZER STRAPS

Secure your ladder against movement. Simply wrap the straps around each ladder leg, nail the plate into the roof deck and tighten until secure.



73-343

SHORT BODY LADDER JACK

MIG welded 2-rung ladder jack with riveted construction for superior strength and durability. It is set up over 2 consecutive ladder rungs and can be used on either side of a ladder.



73-400

FEATURES

- Easy installation.
- Minimizes lateral movement or rocking.
- Solid zinc cam buckles.
- Can be used with most roofing materials.
- Helps protect gutters and roof edges.

- Tough riveted and welded ladder jacks will work on the inside or outside ladder face.
- Super quick set-up and tear down.
- Should be fully decked using an 18" wide platform that complies with OSHA requirements.
- Adjustable to fit round or "D" rung ladders.
- Ideal for painting, siding, and repair applications.

LADDER RUNG STEP

The ladder rung step is specially designed to reduce worker fatigue by expanding the foot support of the ladder rung.



THERE ARE 300,000+
LADDER-RELATED INJURIES
IN THE UNITED STATES
EVERY YEAR.

73-405

FEATURES

- Provides more stability to the extension ladder.
- Compatible with nearly any ladder.
- Made from durable and lightweight aluminum.
- Installs quickly and easily without any tools.

ROOF HATCH SAFETY GRAB

The Primegrip Safety Grab is engineered to provide safe access through roof hatches while having added functionality and weight-bearing support. The Safety Grab mounts to a corner section through the curb counterflashing.



73-501

FEATURES

- Easy assembly and installation.
- Permanent mounting.
- Powder-coated safety green/yellow finish.

PART #	PRODUCT NAME
73-501	18" SAFETY GRAB FOR ROOF HATCH
73-502	24" SAFETY GRAB FOR ROOF HATCH

TECHNICAL SPECIFICATIONS	
Rails & Posts	11/4" steel pipe, 1/8" thickness
Fittings	3/8"-16×3/4" hex bolt and 3/8" flat washer
Mounting Brackets	3/16" steel with nut backing plate
Hardware	3/8"-16×3/4" hex head bolts, powder coated

CHIMNEY CAPS

Helps keep debris and rodents out of the chimney.



45-522

FEATURES

- Cold-rolled steel.
- Powder coating.
- Black finish.

PART #	PRODUCT NAME
45-522	8"×8" CHIMNEY CAP
45-523	8"×12" CHIMNEY CAP
45-526	12"×12" CHIMNEY CAP

ROOFING AIR KNIFE

Cuts shingles effortlessly and efficiently, drastically reducing time spent on cutting shingles and instances of waste material due to inaccurate cuts. Ideal for cutting tougher material like fiberglass shingles or frozen shingles in harsh winter conditions.



36-210

- Sturdy and lightweight aluminum construction.
- Swiveling quick connect attachment for air hoses.
- Use with Primegrip 36-212 high carbon blades.
- Can be used to cut EPDM membranes, insulation, single ply roofing systems, etc.
- Safety lock to prevent accidental operation.

PART#	PRODUCT NAME
36-210	ROOFING AIR KNIFE
36-212	ROOFING AIR KNIFE BLADES—3 PACK

TECHNICAL SPECIFICATIONS	
SPEED	20,000 OPM
CONSUMPTION	3 CFM
WEIGHT	2 LB (1 KG)
AIR PRESSURE	90 PSI
NOISE	80 dB

KNUCKLE SAVER ROOFING KNIFE

Specially designed with an extra long handle to keep knuckles clear and safe while cutting roofing shingles. The contoured grip keeps the knife from slipping and includes a wide lanyard hole for easy carrying.

KNUCKLE SAVER

Roofing knife specially designed with an extra long handle to keep knuckles clear and safe while cutting shingles.



36-292

FEATURES

- Long handle keeps knuckles from grazing against shingles.
- Angled grip for easy cutting around caps, dormers and tight corners.
- Bulging grip prevents slipping.
- Lanyard hole for easy hands-free carry.
- Long lasting zinc-reinforced bottom edge and shallow screw for opening quickly.
- High visibility fluorescent green colour.
- Clip holder keeps blades from rattling inside; comes with 3 SK5 hook and 2 straight blades.

BULT BATTLE STRONG:

RETRACTABLE UTILITY KNIFE

Heavy duty utility knife.



36-250

ROOFER'S KNIFE

Standard replaceable blade utility knife. A short, curved grip provides tactile control without sacrificing comfort.



36-274

FEATURES

- Patented rapid blade change system.
- Spring-loaded safety toggle.
- Rear blade storage.
- Durable metal body.
- Slip-resistant cushion grip.
- Comes with a straight blade.

FEATURES

- Works with standard 2-notch utility blades.
- Brass notched wheel for easy opening and blade change.
- Long-lasting reinforced underside.
- Comes with 3 hook blades and 2 straight blades.
- Includes a durable plastic holder.



BARRACUDA PROFESSIONAL KNIFE

Retractable roofing knife with flip down blade storage.



36-279

ROOFER'S SHARK KNIFE

Designed for professionals who prefer a longer, straight grip instead of more traditional curved roofing knives.



36-280

FEATURES

- Durable and lightweight aluminum body.
- Ergonomic ABS grip prevents knife from slipping.
- Quick release button allows blade change without opening the knife.
- Spare blade storage inside the handle.
- Comes with 2 hook blades.

- Works with any 2-notch utility blades.
- Brass notched wheel for easy opening and blade change.
- The handle is designed to reduce hand and wrist fatigue.
- Robust aluminum body with a polished finish.
- Comes with 1 straight blade.
- Includes a durable plastic holster.

FIXED BLADE SWING TYPE KNIFE

General purpose knife with a swivel handle for quick blade changes.



36-290

DUAL BLADE ROOFING KNIFE

This uniquely designed dual-ended knife allows the user to equip two different styles of blades.



36-291

FEATURES

- Handle swivels open for quick, easy blade change.
- Comfortable, contoured 6" handle.
- Interlocking nose design for safety.
- Works with all Primegrip replacement utility straight and hook blades.
- 3 blades included.

FEATURES

- Does the job of 2 knives.
- Fast front end blade changes.
- Mix or match any 2 blades.
- Features safety interlock preventing both blades from simultaneous extension.
- Includes 1 hooked blade for shingles and 1 utility blade for roofing paper.

SK5 HOOK BLADES—10 PACK



36-222

18MM SK2 SNAP OFF HOOK BLADES—5 PACK



36-223

FEATURES

- High quality SK5 steel heat-treated for strength.
- Induction-hardened edge offers 75% longer-lasting blade life.
- Can be used with all Primegrip knives.

- 18 mm segmented roofer's hook blade
- 4 segments per blade—20 cutting edges per pack
- Superior SK2 steel heat-treated for strength
- Induction-hardened edge offers 75% longer-lasting blade life
- Can be used with all Primegrip knives

PREMIUM KNIFE BLADES

Primegrip knife blades can be used with most utility and roofing knives to cut roofing shingles, felt paper, foam board, insulation, shingles and other building materials. Manufactured from high-grade carbon steel and induction hardened for longevity, our blades last up to 75% longer.



36-253



36-256



36-257



36-258

- Can be used with all Primegrip knives.
- Induction-hardened edge offers 75% longer-lasting blade life.
- Heat treated for strength and induction hardened for longevity.
- Titanium improves wear resistance and extends blade life even more than steel—ideal for cutting through more abrasive materials.
- Available in 5 Pack or 100 Pack.

PART#	PRODUCT NAME
36-251	3-NOTCH STRAIGHT BLADES—5 PACK
36-261	3-NOTCH STRAIGHT BLADES—100 PACK
36-253	2-NOTCH STRAIGHT BLADES—5 PACK
36-263	2-NOTCH STRAIGHT BLADES—100 PACK
36-256	2-NOTCH DEEP HOOK BLADES—5 PACK
36-266	2-NOTCH DEEP HOOK BLADES—100 PACK

PART#	PRODUCT NAME
36-257	2-NOTCH TITANIUM SUPER HOOK BLADES—5 PACK
36-267	2-NOTCH TITANIUM SUPER HOOK BLADES—100 PACK
36-258	2-NOTCH BLUNT HOOK BLADES—5 PACK
36-268	2-NOTCH BLUNT HOOK BLADES—100 PACK
36-259	2-NOTCH SUPER HOOK BLADES—5 PACK
36-269	2-NOTCH SUPER HOOK BLADES—100 PACK

SHINGLE CUTTER

Designed for accurate and repeatable cuts at any angle, as well as lengthwise cuts for the starter course used along the lower edge of the roof.



73-340

ALUMINUM SHINGLE CUTTER

Efficient, lightweight and easy to use shingle cutter designed to save you time, money and effort on the job.



73-341

FEATURES

- Standard and offset guide fences to cut any angle.
- Cuts any asphalt or fiberglass shingle.
- Cuts material face up or down, and from top or bottom edge as needed.
- Cuts starter row (Imperial or Metric) and ridge cap.

FEATURES

- Makes cutting all types of fiberglass and asphalt shingles fast, easy, and accurate.
- Quick reference cutting enables cuts at any length or angle without any set up or adjustment.
- Durable aluminum construction makes it very lightweight and easy to handle.
- Blades are easily sharpened.

HICKORY SHINGLING HATCHETS

The Primegrip line of hickory shingling hatchets is famed for its solid and durable construction, lightweight and ergonomic handle design with a range of available sizes. Professional quality high carbon steel heads with hardened faces strike hard and true, and the premium hickory handles with their lacquered finishes are a beauty to behold.



- Fixed blade and replaceable gauge.
- Triple wedge construction and milled face.
- Premium hickory handle, flame and lacquer finish.
- 4 head sizes: 14 oz, 16 oz, 20 oz and 24 oz.

PART#	PRODUCT NAME
04-442	16 OZ SHINGLING HATCHET
04-443	14 OZ SHINGLING HATCHET
04-444	20 OZ SHINGLING HATCHET
04-445	24 OZ SHINGLING HATCHET

16 OZ STEEL SHINGLING HATCHET

Shingling hatchet drop-forged from a single piece of high carbon steel with shock absorbing cushion grip.



04-456

FEATURES

- Single piece drop-forged high grade carbon steel.
- Heat treated and tempered for maximum strength.
- 16 oz head with depth gauge, nail notch and a milled face.
- Shock absorbing ergonomic cushion grip.

ANTI-VIBRATION SHINGLING HATCHET

Solid steel shingling hatchet drop-forged from a single piece of high carbon steel for ultimate durability. The antivibration handle offers a smooth, comfortable experience.



04-458

FEATURES

- Drop-forged from high grade carbon steel.
- Heat treated and tempered for maximum strength.
- Finely polished and balanced.
- 14 oz head with depth gauge, nail notch and milled face.
- Shock absorbing anti-vibration handle.



ESTWING SHINGLING HATCHETS

Estwing's Solid Steel Shingling Hatchet has a fully polished head and handle neck, molded on nylon vinyl Shock Reduction Grip®.



E3-S

REPLACEABLE BLADE HATCHET

Solid steel milled face shingling hatchet with polished head and neck, nylon vinyl grip and a retractable cutting blade. Adjustable for 4", 5", 5%" exposure.



E3-CA

FEATURES

- Solid steel construction and milled face.
- 1.8125" edge & 1.625" edge.
- Blue Shock Reduction Grip®.
- Made in the USA.

PART#	PRODUCT NAME
E3-S	MILLED FACE SHINGLING HATCHET
E3-LS	MILLED FACE LIGHTWEIGHT SHINGLING HATCHET

FEATURES

- Solid steel construction.
- Replaceable blade and gauge.
- Milled face.
- 1.8125" cutting edge.
- Blue Shock Reduction Grip®.
- Made in the USA.

16 OZ CLAW HAMMER

Standard multi-purpose claw hammer with a forged steel head and fiberglass handle.



04-175

FEATURES

- Durable forged steel head.
- Super strong, ultra-light and anti-vibration fiberglass ergonomic handle.
- Sharp claw for precision and efficiency.
- Ideal for masonry, walls, bricks and concrete.

ESTWING RIPPING HAMMERS

Estwing's Ripping Hammers feature a single-piece forged head and handle. The Shock Reduction Grip® offers the utmost in comfort and durability, reducing vibrations caused by impact.



E3-165

FEATURES

- Solid steel construction.
- Smooth face.
- Two sizes: 16 and 20 oz head weight.
- Blue Shock Reduction Grip®.
- Made in the USA.

PART#	PRODUCT NAME
E3-16S	16 OZ RIPPING HAMMER
E3-20S	20 OZ RIPPING HAMMER

6 MM – 10 MM HAMMER TACKER

Heavy duty hammer tacker with contractor grade quality steel construction and a shock-absorbing rubber grip.



04-951

ARROW HAMMER TACKER

Made with a chromed steel housing, all-steel working parts hardened in a 1,500° furnace, and a high impact sure-grip handle. Holds two full strips of T50 staples.



AR-HT50P

FEATURES

- Ideal for fast installation of roofing materials, insulation, or carpeting.
- Heavy-duty steel construction for added durability.
- Full rubber grip absorbs shocks and protects hands.
- Uses ¼" ¾" (6 mm 10 mm) staples.

- Durable chrome finish.
- All-steel construction.
- Specially designed power grip handle.
- Jam-proof mechanism.

ARROW T50 STAPLES

Arrow T50 staples deliver exceptional holding power for heavy duty stapling applications.



AR-506

FEATURES

- For use with all T50 system tools.
- Ideal for installing insulation, housewraps, roofing underlayments, upholstery, etc.
- Available in a range of staple sizes and pack quantities.

PART#	PRODUCT NAME
AR-504	¼"—1250 PACK
AR-505	%6"—1250 PACK
AR-506	%"—1250 PACK
AR-508	½"—1250 PACK
AR-509	%₅"—1250 PACK
AR-50CT	CEILTILE STAPLES—1250 PACK
AR-504IP	1⁄4"—5000 PACK
AR-505IP	%6"—5000 PACK
AR-506IP	%"—5000 PACK
AR-508IP	½"—5000 PACK

SURE-PICK MAGNET BROOMS

Primegrip magnet brooms help clean metal debris from hard to reach areas, come with a removable magnet for easy cleaning and a range of sizes.

FEATURES

- Removable magnet for easy cleaning.
- Easy to use on most surfaces.
- Available in 20" and 24" magnet widths.

PART#	PRODUCT NAME
73-222	20" SURE-PICK MAGNET BROOM
73-223	24" SURE-PICK MAGNET BROOM



73-222


MAGNET BROOM WITH U-HANDLE

Primegrip magnet brooms help clean metal debris from hard to reach areas, come with a removable magnet for easy cleaning and a range of sizes.

FEATURES

- Extra wide 36" magnet broom to cover wide areas quickly and efficiently.
- Removable magnet for easy cleaning.
- Easy to use on most surfaces.
- Ergonomically designed U-handle for minimal pushing effort.

EXTRA WIDE 36" MAGNET BROOM TO COVER WIDE AREAS QUICKLY

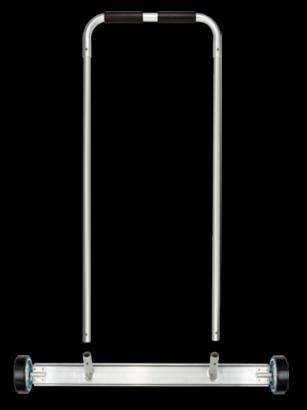

73-255

18" MAGNET BROOM

Economical and compact magnet broom, ideal for small areas.



73-218

FEATURES

- Removable handle for storage and transportation.
- Easy to use on most surfaces.

CLAWVERINE

This patented tool is the ultimate solution for cleaning nails from step flashing. Use the prying end to locate nails hidden under step flashing and lift them up slightly. Simply hook the nail into one of the slits in the extractor head, and pivot horizontally against the wall to pull the nail out. Reduces effort and saves money by avoiding damaged step flashing!





09-276

- Sleek, strong and rugged design.
- Rounded extractor head has notches that enable easy removal of nails from tight spots with a single turning motion.
- Bent pry bar end provides increased leverage to lift flashing or pry nails.
- Simple construction allows the Clawverine to fit into any standard tool holder.





- The unique claw head with nail pullers extracts nails without damaging shingles, walls, step flashing and saves you money.
- The raised handle provides additional leverage and prevents damage to hands from work surfaces.
- Hook the nail with one of the extractor slits and pivot horizontally against the wall to pull the nail out.

CLAWVERINE

- Doesn't damage walls
- Doesn't damage step flashing
- Doesn't damage shingles
- Fits into any standard hammer holder
- High quality heat-treated forged spring steel







TRADITIONAL PRY BAR

- Can damage walls
- Can damage step flashing
- Can damage shingles
- Can't be carried on a belt or pouch
- Crude construction





15" UTILITY BAR

Portable lightweight prying bar. Ideal for pulling nails, prying, lifting and scraping.



09-201

SHINGLE NAILING TOOL

Makes replacing asphalt shingles safer, easier and more accurate than traditional methods.



09-277

FEATURES

- Contoured shape makes pulling nails, prying, lifting and scraping easier.
- Nail slots at both ends for easy nail removal.
- Forged high-carbon steel for increased strength and durability.

FEATURES

- Easy installation of 3-tab shingles without striking surrounding shingles or fingers with the hammer.
- Offset nail-slot aligns new nails with proper 1" offset from the bottom edge of existing course.
- Nail pulling claw for removing nails.

SHINGLE POPPER

Roofer's shingle removal shovel.



83-330

FEATURES

- Steel head with teeth on the front and back.
- Plate welded to the front for strength and shingle lifting.
- Has gliders underneath head for lifting leverage.
- Handle made of high quality Canadian hickory.

PART#	PRODUCT NAME
83-330	36" SHINGLE POPPER WITH D-GRIP
83-329	48" SHINGLE POPPER WITH D-GRIP
83-321	24" MINI SHINGLE POPPER
83-331	48" SHINGLE POPPER



This is it. After 35 years doing what we do, we know a thing or two about what roofers are looking for. They want durability and reliability. A certain ease and definitely some style. Enter the tool of kings, the king of tools. There are many out there, but let's not kid ourselves...



This is the Bosta Bosta

FEATURES

- Lightweight and durable.
- Pries forwards and backwards for increased productivity.
- Centre wing at the base of the handle allows shingles to slide off effortlessly.
- Patented EZ-Gliders under the blade allow seamless gliding and increased leverage for prying nails, resulting in up to 75% less effort and more efficiency.



BUILT BATTLE STRONG







PART#	PRODUCT NAME
83-306	36" HANDLE BEST DAMN RIPPER WITH D-GRIP
83-307	48" HANDLE BEST DAMN RIPPER

HEAVY DUTY ROOFER'S SHOVEL

Roofer's shingle removal shovel.



HEAVY DUTY PITCH FORK

Spading fork, ideal for lifting shingles and sheeting.



83-333 83-337

FEATURES

- Single piece forged steel head.
- Welded rear plate for lifting leverage.
- 42" ash handle with metal and wood D-grip.

- Single piece forged and tempered steel head.
- Four 10" tines with golden finish.
- Ash handle with D-grip.



Rapid urbanization, technological innovations, infrastructure development and a big surge in construction are driving tremendous growth in the flat roofing segment. We pride ourselves on being an essential part of this segment by offering high quality products that meet the most stringent work standards. We offer an extensive selection of tools and equipment to fit the modern flat roofer's needs.

ROLLERS DRAIN SEALS

MOPS & SQUEEGEES FELT KNIVES

TORCHES HEAT GUNS

NEOPRENE SQUEEGEES

Petroleum-resistant and flexible neoprene rubber blade with serrated edge.



SAHARA SQUEEGEES

The Sahara squeegee blade can be used for hot applications up to 247° C (478° F). Has a low reactivity with chemicals.



72-121

72-125

FEATURES

- 16 Gauge plated steel frame.
- 2" high and ¼" thick neoprene rubber blade.
- Equipped with a built-in scraper.
- Steel socket accepts a 1%" tapered handle.
- Made in the USA.

PART#	PRODUCT NAME
72-120	24" NEOPRENE APPLICATOR SERRATED SQUEEGEE
72-121	30" NEOPRENE APPLICATOR SERRATED SQUEEGEE
72-122	36" NEOPRENE APPLICATOR SERRATED SQUEEGEE

FEATURES

- 16 Gauge plated steel frame.
- 2" high and ¼" thick neoprene rubber blade.
- Equipped with a built-in scraper.
- Steel socket accepts a 1%" tapered handle.
- Made in the USA.

PART#	PRODUCT NAME
72-123	24" SAHARA SERRATED SQUEEGEE
72-124	18" SAHARA FLAT SQUEEGEE
72-125	24" SAHARA FLAT SQUEEGEE

MOP YARN

Cotton mop yarn bundles.



72-105

- Economical and inexpensive.
- 100% cotton with good pick up.
- Each hank tied twice.
- Packed in 30 lb cartons.
- Uses 6' or 8' handles with bell adapter.

PART#	PRODUCT NAME
72-105	24" MOP YARN
72-106	30" MOP YARN

MOP ACCESSORIES

Accessories for mod bit mops. Heads and connectors to use with mop yarn as well as handles to create complete mops for spreading mod bit in commercial roofing applications.



PART#	PRODUCT NAME	DESCRIPTION
72-100	Pin Adapter	Heavy gauge steel pin-head mop adapter. Attaches with ¼"×2" bolts to 1¼" roller mop handle or pin mops, and to wood handle.
72-101	Mop Steel Bell Adapter	Staple-through mop bell holds yarn securely.
72-102	Mop Compression Head Adapter	Spring type compression head with thumb screw for easy adjustment.
72-103	4" Mop Head Wire Clip	4" staple holds yarn securely through mop bell.
72-108	5" Mop Head Wire Clip	5" staple holds yarn securely through mop bell.
72-107	Mop Bell Head	Bell head for mop.

CAST ALUMINUM DIPPER


Aluminum dipper for flat roofing.



70-001

GRAVEL PUSHER

Aluminum gravel pusher to spread gravel evenly.



70-004

ASPHALT SKIMMER

Kettle skimmer used to skim asphalt.



PIGTAIL HOOK

Durable pigtail hook for safe and convenient connections with any bucket.



72-110 72-200

FEATURES

- 10"×12" expanded steel screen, reinforced edges.
- 60" handle to remove debris from asphalt kettles.
- Prevents kettle fires.

FEATURES

- Helps reduce accidents.
- Bucket hook won't come off slack rope.
- Easily manipulated.

12" GINWHEEL WITH HOOK

All purpose gin wheel.


FEATURES

- Highest quality die-cast aluminum wheel.
- Maintenance-free bearings and all-steel framework.
- Heavy-duty forged swivel hook with safety clip.
- Use with ¾" rope only.



72-202

A complete line of felt knives ranging in size from 3"-8". All our felt knives are manufactured from the highest quality materials and are ideal for cutting felt paper, sheeting and insulating boards.



FELT KNIVES—DURAGRIP

A complete line of felt knives ranging in size from 3"-8". All our felt knives are manufactured from the highest quality materials and are ideal for cutting felt paper, sheeting and insulating boards.





36-302

36-273

FEATURES

- 3", 4", 6" and 8" blade lengths.
- Ideal for roofers.
- High quality spring steel.
- High quality wooden handle.

PART #	PRODUCT NAME
36-271	3" FELT KNIFE WITH WOODEN HANDLE
36-273	4" FELT KNIFE WITH WOODEN HANDLE
36-305	6" FELT KNIFE WITH WOODEN HANDLE
36-306	8" FELT KNIFE WITH WOODEN HANDLE

FEATURES

- 3", 4", 6" and 8" blade lengths.
- Ideal for roofers.
- High quality spring steel.
- Soft rubber "Duragrip" handle.

PART#	PRODUCT NAME
36-301	3" FELT KNIFE WITH DURAGRIP HANDLE
36-302	4" FELT KNIFE WITH DURAGRIP HANDLE
36-303	6" FELT KNIFE WITH DURAGRIP HANDLE
36-304	8" FELT KNIFE WITH DURAGRIP HANDLE

STAINLESS STEEL SCISSORS

Stainless steel scissors ideal for cutting various fabrics and upholstery.



36-468

FEATURES

- Hot drop-forged nickel plated blades.
- Precision ground for sharper cutting edges and longer blade life.
- Handle designed to comfortably fit user's hands.
- Available in 3 sizes: 8", 10" and 12".

PART #	PRODUCT NAME
36-464	8" STAINLESS STEEL SCISSORS
36-466	10" STAINLESS STEEL SCISSORS
36-468	12" STAINLESS STEEL SCISSORS

TEFLON-COATED SCISSORS

11" Teflon-coated stainless steel scissors ideal for cutting glued papers, fabrics or adhesive tapes.



2-STAR ANGULAR BLADE

Carbide blade for use with powered tear-off tools and roof saws.



36-275

36-470

FEATURES

- Serrated edge holds fabrics for a precise cut.
- Ergonomic handle is easy on the hands.
- Perfect for cutting sticky material like tape, building wraps and roof membranes.

FEATURES

- 12" carbide-tipped blades for economical cut.
- Carbide tips offer a less resistant cut.
- Laser cut A235 high carbon steel blades and induction welded carbide inserts for strength and impact resistance.

CORE CUTTERS

Specialty tool designed to take roof test cuts easily and efficiently.



22-402

4-STAR ANGULAR BLADE

Carbide blade for use with powered tear-off tools and roof saws.



36-276

FEATURES

- Precision machined, sharpened and heat treated for long life.
- The specially hardened teeth can be resharpened.
- Removable handles for easy transport and storage.
- Available in 2" and 3" diameters.

PART#	PRODUCT NAME
22-402	2" CORE CUTTER
22-403	3" CORE CUTTER

- Superior performance and long life.
- Angled cutting edge for maximum surface contact.
- The tip angle reduces wear and increases power efficiency.

MECHANICAL DRAIN SEALS

Mechanical compression seals used to secure insert type retrofit drains to existing drainpipes in re-roofing applications. Provide a watertight connection to the existing drain leader, preventing leakage at the connection in the event of water backup in the drain.

46-004



FEATURES

- Tough polypropylene (PP) flange and stainless steel screws provide the necessary strength torque to compress the EPDM rubber gasket.
- The flexible rubber is expanded by tightening the screws, forming a watertight seal at the connection.
- Use with Drain Seal Screwdriver (46-100).
- Available in 3", 4", 5" and 6" sizes.

TECHNICAL SPECIFICATIONS	3" DRAIN SEAL	4" DRAIN SEAL	5" DRAIN SEAL	6" DRAIN SEAL
Part #	46-003	46-004	46-005	46-006
Material	Polypropylene & EPDM	Polypropylene & EPDM	Polypropylene & EPDM	Polypropylene & EPDM
Low temperature impact	-40°C (ASTM D-2136)	-40°C (ASTM D-2136)	-40°C (ASTM D-2136)	-40°C (ASTM D-2136)
Brittle point	-57.8°C (ASTM D-746)	-57.8°C (ASTM D-746)	-57.8°C (ASTM D-746)	-57.8°C (ASTM D-746)
Accelerated weathering	Min. 5,000 hours (ASTM D-2565 xenon)			
Linear dimension change	0.0% (ASTM D-1204)	0.0% (ASTM D-1204)	0.0% (ASTM D-1204)	0.0% (ASTM D-1204)
24h immersion weight change	0.0% (ASTM D-570)	0.0% (ASTM D-570)	0.0% (ASTM D-570)	0.0% (ASTM D-570)
Back-up pressure resistance	>35 KPA	>35 KPA	>35 KPA	>35 KPA
Standard overall thickness	0.20"	0.20"	0.20"	0.20"
Standard inside diameter	2.01"	2.62"	3.93"	4.86"
Min. Height (uncompressed)	2.76"	2.76"	2.76"	2.76"
Max. Height (uncompressed)	4.14"	4.14"	4.14"	4.14"

DRAIN SEAL SCREWDRIVER

24" #2 Robertson screwdriver for 3" – 6" Drain Seals (46-003 – 46-006). It is used to tighten the special recess head screws on the drain seal.



FEATURES

- 24" shaft ensures ease of reach when tightening the seal connection screws.
- Extra wide pistol grip handle prevents accidental drop into the drain.

46-100

MAXXFLO™ DRAIN SEALS

The Primegrip Maxxflo™ Drain Seal is a revolutionary device that seals retrofit drains to existing drainpipes in re-roofing applications. Our patented design features a single unit flange that does not require screws to achieve mechanical compression and seal activation, saving time and assuring equal compression of the seal.





FEATURES

- Significantly faster installation than conventional drain seals without the need to tighten compression screws.
- Single unit Nylon/ABS-EPDM construction assures equal compression on all sides of the seal resulting in a far more secure fit.
- The lack of obstruction from screws minimizes debris accumulation, maximizes water flow and eliminates metal parts fatigue.
- Can be used with a size specific (46-101 46-104) tool or the Maxxflo Universal Tool (46-109).

TECHNICAL SPECIFICATIONS	MAXXFLO 3" DRAIN SEAL	MAXXFLO 4" DRAIN SEAL	MAXXFLO 5" DRAIN SEAL	MAXXFLO 6" DRAIN SEAL
Part #	46-007	46-008	46-009	46-010
Material	ABS & EPDM	ABS & EPDM	Nylon & EPDM	ABS & EPDM
Low temperature impact	-40°C (ASTM D-2136)	-40°C (ASTM D-2136)	-40°C (ASTM D-2136)	-40°C (ASTM D-2136)
Brittle point	-57.8°C (ASTM D-746)	-57.8°C (ASTM D-746)	-57.8°C (ASTM D-746)	-57.8°C (ASTM D-746)
Accelerated weathering	Min. 5,000 hours (ASTM D-2565 xenon)			
Linear dimension change	0.0% (ASTM D-1204)	0.0% (ASTM D-1204)	0.0% (ASTM D-1204)	0.0% (ASTM D-1204)
24h immersion weight change	0.0% (ASTM D-570)	0.0% (ASTM D-570)	0.0% (ASTM D-570)	0.0% (ASTM D-570)
Back-up pressure resistance	>35 KPA	>35 KPA	>35 KPA	>35 KPA
Standard inside diameter	2.00"	2.62"	3.93"	4.86"

46-008

MAXXFLO SEAL TOOLS

Compression tools for MAXXFLO line of drain seals.



46-101

- Solid steel construction.
- Wide grip handle for comfort and minimal effort.

PART#	PRODUCT NAME
46-101	MAXXFLO 3" DRAIN SEAL TOOL
46-102	MAXXFLO 4" DRAIN SEAL TOOL
46-103	MAXXFLO 6" DRAIN SEAL TOOL
46-104	MAXXFLO 5" DRAIN SEAL TOOL
46-109	MAXXFLO UNIVERSAL TOOL

FLEXIBLE PIPE COUPLINGS

Flexible couplings for leakproof pipe seals.



46-204

TEST PLUGS

Economy test plug with wing nut.



46-901

FEATURES

- Connect cast iron, plastic, copper or steel pipe.
- For drain, waste and vent pipes only.
- Meet Uniform Plumbing Code, CSA B602 Type A and ASTM C1173 standards.
- Installation torque: 60 inch lb.

PART#	PRODUCT NAME
46-203	3" FLEXIBLE COUPLING
46-204	4" FLEXIBLE COUPLING
46-206	6" FLEXIBLE COUPLING
46-207	4"×3" FLEXIBLE COUPLING REDUCER

FEATURES

- Moulded rubber plug.
- Galvanized steel cap end and wing nut.
- Positive seal in soil, plastic or copper pipe.

PART #	PRODUCT NAME
46-900	3" TEST PLUG
46-901	4" TEST PLUG

HEAT GUN KIT

The Primegrip hot air welding gun can be used to weld all types of thermoplastic materials for roofing and flooring applications, tarps, plastic fabrication, etc.



- Air flow of 13.7 m3/hr and up to 650°C temperature..
- Includes: heat gun, 20 mm standard flat welding nozzle, 40 mm standard flat welding nozzle, Primegrip 72-000 Silicone Roller (1"×1") and "T" Heating Element. Comes in a carrying case.

TECHNICAL SPECIFICATIONS	
Voltage	120V
Frequency	60 Hz
Power	1,600W
Air Pressure	2100 Pa
Air Volume	13.7 m³/hr
Temperature Range	40°C-650°C
Temperature Control	Constant Temperature
Noise	<60 dB
Barrel Diameter	32 mm
Heat Shroud	Yes
Grip Diameter	56 mm
IEC Protection Class	п
Certification Mark	CE
Weight	1.2 kg

HEAT GUN NOZZLES

Primegrip line of stainless steel hot air welding nozzles.







19-404

19-409

19-418

PART#	PRODUCT NAME
19-404	20 MM STANDARD NOZZLE
19-406	40 MM STANDARD NOZZLE
19-408	80 MM STANDARD NOZZLE
19-409	20 MM 90° NOZZLE
19-410	5 MM ROUND NOZZLE
19-411	5×150 MM ROUND NOZZLE


PART#	PRODUCT NAME
19-412	20×150 MM ROUND NOZZLE
19-413	5 MM NOZZLE WITH BRASS ROLLER WELDING TIP
19-415	7×5×5 MM / 5.7×3.7×3.7 MM TRIANGLE SPEED WELDING NOZZLE
19-416	TACKING NOZZLE
19-417	20 MM 45° NOZZLE
19-418	40 MM 45° NOZZLE

HEAT GUN ELEMENT

110V replacement "T" heating element for heat gun.



19-512

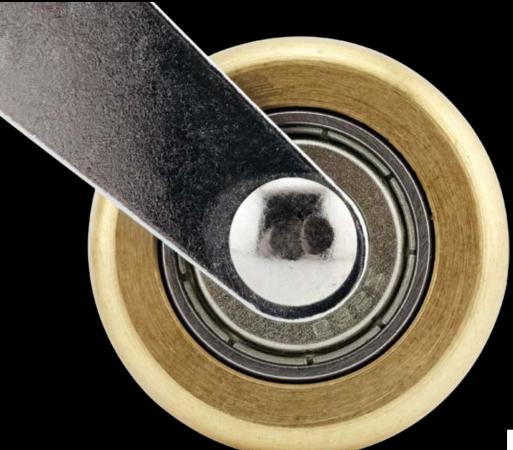

SEAM ROLLERS

Primegrip offers an extensive line of silicone and steel rollers for single ply roof membranes and flooring applications.

SILICONE ROLLERS

Lightweight and heat-resistant rollers with strong birch wood handles.

STEEL ROLLERS

Higher durability rollers with ability to apply more pressure for heavy duty applications.

THREADED ROLLERS

These models offer the option of attaching a pole to switch between detail roller and stand-up roller to eliminate bending and apply more pressure.

ERGONOMIC ROLLERS

Resulting from extensive research and industry feedback, these unique designs increase productivity while minimizing the wrist fatigue commonly experienced while welding membrane seams.

SEAM PROBES

Seam probes help check adhesion of membrane seams.

PENNY ROLLERS

Penny rollers are ideal for sealing membranes near edges or tight corners.

STAND-UP ROLLERS

While most of our line is for detail work, these rollers allow you to smooth out membranes quickly over a wide area, and apply more pressure on seams to eliminate gaps.

HEAVY DUTY ROLLERS

Heavy duty steel roller for adhesive-backed membranes.



19-015

EXTENDABLE ROLLER

Extends up to 27". The segmented rollers exert uniform pressure to smooth out uneven surfaces.



19-020

FEATURES

- Rollers turn independently in opposite directions for sharp turns (90° or U-turns) without wrinkling or tearing membranes.
- Independently floating dual-rollers make rolling over irregular surface imperfections easier.
- Sturdy collapsible steel tubing handle.

PART#	PRODUCT NAME
19-012	16 LB HEAVY DUTY ROLLER
19-013	35 LB HEAVY DUTY ROLLER
19-014	75 LB HEAVY DUTY ROLLER
19-015	100 LB HEAVY DUTY ROLLER

FEATURES

- Ideal for rolling TPO and roof membrane.
- 7½" wide segmented rollers.
- Handle adjusts 17" 27".
- Dual grip for easy maneuvering.

SILICONE ROLLERS

Primegrip offers an extensive line of silicone membrane seam rollers in a wide variety of sizes.



72-028

BUILT BATTLE STRONG

- Heat-resistant silicone seam roller.
- Used to compress roof membranes when sealing joints.
- High quality bearings and birch wood handle.

PART#	PRODUCT NAME
72-000	1"×1" SINGLE FORK SILICONE ROLLER
72-001	1¼"×1¾" SINGLE FORK SILICONE ROLLER
72-002	2"×4" DOUBLE FORK SILICONE ROLLER
72-020	1"×11/4" SINGLE FORK SILICONE ROLLER
72-022	1¾"×1¼" SINGLE FORK SILICONE ROLLER
72-026	1"×1¼" DOUBLE HEAD SILICONE ROLLER
72-028	3½"×1¼" DOUBLE FORK SILICONE ROLLER

2-IN-1 SILICONE/PENNY ROLLER

Double-end combination seam roller and penny roller.



2-IN-1 SILICONE ROLLER/SEAM PROBE

Double-end combination seam roller and seam probe.



72-031

72-030

FEATURES

- Single fork with enclosed bearings.
- 1½"×1¾" silicone roller, 1½"×½" brass penny roller.
- 5" birch wood handle.

FEATURES

- Single fork with enclosed bearings.
- 1½"×1¾" silicone roller, stainless seam probe.
- 5" birch wood handle.

ERGONOMIC SILICONE ROLLER

Angled roller specially designed to minimize wrist fatigue.



72-036

STEEL ROLLERS

Primegrip offers an extensive line of steel membrane seam rollers in a wide variety of sizes.



72-035

FEATURES

- Heat-resistant silicone seam roller.
- Used to compress roof membranes when sealing joints.
- L-shaped offset fork reduces wrist fatigue.
- 1½"×1¾" silicone roller, 4½" birch wood handle.

FEATURES

- Heavy duty steel seam roller.
- Used to compress roof membranes when sealing joints.
- Solid double brass bearings, birch wood handle.

PART#	PRODUCT NAME
72-032	2"×2" SINGLE FORK STEEL ROLLER
72-033	2"×2" DOUBLE FORK STEEL ROLLER
72-034	2"×2" RADIUS EDGE STEEL ROLLER
72-035	2"×4" DOUBLE FORK STEEL ROLLER

1/4" BRASS PENNY ROLLER

Slim brass roller ideal for sealing roof membrane near edges or tight corners.



72-029

FEATURES

- Nickel-plated roller mounting and convex brass roller.
- 30 mm diameter.
- Birch wood handle.

STEEL CAMEL ROLLER

This innovative membrane roller features two sets of rollers on either end with a bridge-style steel handle.



72-049

FEATURES

- Features front and rear guide aluminum wheels with 2 different widths.
- Work longer with less effort using the unique ergonomic handle.
- Ideal for PVC membranes and vinyl flooring.

THREADED ROLLERS

Provides the option of attaching a pole to eliminate bending while welding membrane seams.



72-047

FEATURES

- Threaded end allows use with pole—less stress on the back and ability to apply more pressure.
- Double bearing for smoothness when used with an extension pole.
- Extra strong carbon steel frame.
- Cushion-grip provides maximum comfort.

PART#	PRODUCT NAME
72-045	2"×4" THREADED SILICONE ROLLER
72-046	2"×6" THREADED SILICONE ROLLER
72-047	2"×4" THREADED STEEL ROLLER
72-048	2"×6" THREADED STEEL ROLLER

V-TYPE NYLON ROLLER

Slim nylon roller with a V-style tapered edge.



72-007

FEATURES

- Roller hubs taper to a 5/64" rounded edge that won't cut membrane material.
- Double forks.
- 2" diameter x 7/16" width.
- Birch wood handle.

SEAM PROBE

Small probing tool to check adhesion of membrane seams.



72-010

FOLDABLE SEAM PROBE

Small folding probing tool to check adhesion of membrane seams.



72-013

FEATURES

- Heat-treated high carbon steel blade with rounded corners, minimizing chance for damage when inspecting welded seams.
- Angled blade for clearance for hands and knuckles.
- Lightweight and durable plastic handle.

FEATURES

- Zinc plated, hardened steel hook locks in place when open—folds securely into handle when closed.
- Strong plastic handle has finger grips and non-roll-away shape. Belt clip for carrying.
- Liner lock closure mechanism has oversized opening for easy fold-away.

ROUND TROWELS

Round-edged roofing trowels for mod bit applications.



71-003

2"×5" MARGIN TROWEL

Square blade roofing trowel for mod bit applications.



71-005

FEATURES

- Wooden handle.
- Ideal flexibility and grip for mod bit applications.

PART#	PRODUCT NAME
71-002	2"×5½" ROUND-EDGED ROOFING TROWEL
71-003	2"×7" ROUND-EDGED ROOFING TROWEL

- Wooden handle.
- Ideal flexibility and grip for mod bit applications.
- Works as a 2" measuring tool for mod bit overlap margin.

ROLL PULLERS

Allows roofers to pull a granular mod bit membrane roll while torching the application point.



72-207

ALUMINUM FLOAT

Aluminum float used to flatten mod bit layer.



71-006

FEATURES

- Durable lightweight construction.
- Comfortable cushion grip.

PART #	PRODUCT NAME
72-204	ROLL PULLER
72-207	EXTENDABLE ALUMINUM ROLL PULLER


FEATURES

- Easy to clean aluminum construction.
- Balanced weight for even application.
- Wooden reinforced insert for heat resistance.

ROOFING TORCHES

A combination of innovation, quality and safety is why roofers prefer Primegrip torches over many others in the market. Our redesigned 2022 torch line is completely modular—you can buy a complete torch kit which is ready to use out of the box, or individual components to suit your needs. We offer premium titanium burners for high BTU applications and stainless steel models for cost-effective requirements. The compatibility chart shows a breakdown of our line, and the components that work with the titanium and steel burners.

COMPATIBILITY CHART

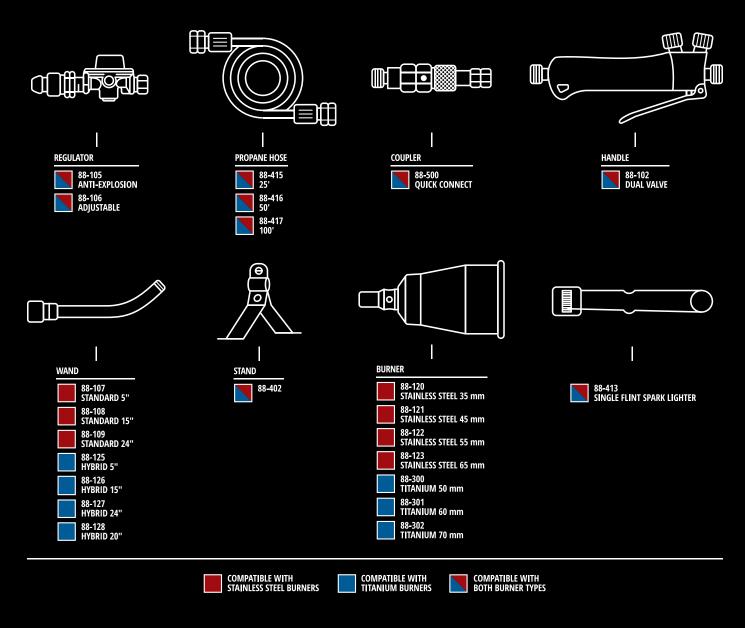

TORCH KITS

Primegrip torch kits offer complete sets of tools needed for mod bit applications—handle, regulator, wand, torch burner and hose. We even include torch holders and a spark lighter—all you need to start the job is propane.







88-337

		88-334	88-335	88-336	88-337	88-900
PART#	PRODUCT NAME	TITANIUM FIELD TORCH KIT	TITANIUM DETAIL TORCH KIT	TITANIUM COMBO TORCH KIT	TITANIUM DELUXE COMBO TORCH KIT	FIRE DRAGON TORCH KIT
88-102	DUAL VALVE TORCH HANDLE	✓	✓	✓	√ √	✓
88-106	ADJUSTABLE TORCH REGULATOR	✓	✓	✓	✓	✓
88-107	5" TORCH WAND					✓
88-109	24" TORCH WAND					✓
88-125	5" HYBRID TORCH WAND		✓	✓	✓	
88-127	24" HYBRID TORCH WAND	✓		✓	✓	
88-121	45 MM TORCH HEAD					✓
88-123	65 MM TORCH HEAD					✓
88-300	50 MM TITANIUM TORCH HEAD		✓	✓	\checkmark	
88-302	70 MM TITANIUM TORCH HEAD	✓		✓	✓	
88-500	QUICK CONNECT COUPLER SET				√ √	
88-415	25' PROPANE HOSE	✓	✓	✓		✓
88-416	50' PROPANE HOSE				✓	
88-413	SINGLE FLINT SPARK LIGHTER			✓	✓	
88-402	STAINLESS STEEL TORCH HOLDER	✓	✓	√ √	√ ✓	√ √

Professional grade torch handle with a state-of-the-art dual valve system that enables the user to utilize a pilot flame in order to save gas.





88-102

TECHNICAL SPECIFICATIONS	
DIAMETER	9/16"
PRESSURE (PSI/BAR)	58/4
MAX FLOW (G/HR)	8250
kw	114

FEATURES

- Primary valve for main flame and a smaller secondary valve for pilot flame adjustment.
- Trigger allows instant switching between pilot and main flame, and can also be used to pulse the main flame when torching.
- All parts are made of brass and machined with laser precision.
- The handle incorporates an ergonomic rubber mould grip for comfort during extended periods of use.

ANTI-EXPLOSION REGULATOR

Pressure regulator for use with propane torches.





88-105

FEATURES

- Anti-explosive system.
- Shut-off valve in case of gas leak.
- Aluminum cast body and ¼" NPT brass fittings.
- CSA approved.

TECHNICAL SPECIFICATIONS	
GAS	PROPANE
INLET PRESSURE	4.5-16 BAR
OUTLET PRESSURE	4 BAR
MAX FLOW	12 (KG/H)
EXCESS FLOW SAFETY	✓
OUTLET CONNECTING UNION	G9/16
INLET UNION	G7/8"LH

ADJUSTABLE REGULATOR

Adjustable pressure regulator for use with propane torches.





88-106

FEATURES

- Adjustable valve up to 60 psi.
- Aluminum body and knob.
- ¼" NPT brass fittings.

TECHNICAL SPECIFICATIONS	
GAS	LPG
INLET PRESSURE	1-16 BAR
OUTLET PRESSURE	0.5-4 BAR
MAX FLOW	8 (KG/H)
EXCESS FLOW SAFETY	✓
OUTLET CONNECTING UNION	G9/16
INLET UNION	G7/8"LH

STANDARD WANDS

Stainless steel torch wands compatible with all stainless steel torch burners.





88-109

FEATURES

- Stainless steel wand.
- Fits any Primegrip stainless steel burner.

PART#	PRODUCT NAME	LENGTH (IN/MM)	WEIGHT (G/LB)
88-107	5" STANDARD TORCH WAND	5/127	122/0.27
88-108	15" STANDARD TORCH WAND	15/381	195.5/0.43
88-109	24" STANDARD TORCH WAND	24/610	252/0.56

FITS ALL PRIMEGRIP
STAINLESS STEEL BURNERS

HYBRID WANDS

Stainless steel torch wands compatible with all titanium torch burners.





88-127

FEATURES

- Stainless steel wand.
- Fits any Primegrip titanium burner.

PART#	PRODUCT NAME	LENGTH (IN/MM)	WEIGHT (G/LB)
88-125	5" HYBRID TORCH WAND	5/127	122/0.27
88-126	15" HYBRID TORCH WAND	15/381	195.5/0.43
88-127	24" HYBRID TORCH WAND	24/610	252/0.56
88-128	20" HYBRID TORCH WAND	20/508	227/0.50

FITS ALL PRIMEGRIP TITANIUM BURNERS

EXPRESS TYPE WANDS

Stainless steel and brass wands designed specially for Express torch burners.



SOPREMA TYPE WANDS

Stainless steel and brass wands designed specially for Soprema torch heads.



88-132

88-135

FEATURES

- Stainless steel wand with brass fittings.
- Fits any Express burner.

PART#	PRODUCT NAME
00.430	420 MM F TYPE TORSH WAND
88-130	130 MM E-TYPE TORCH WAND
88-131	400 MM E-TYPE TORCH WAND
88-132	600 MM E-TYPE TORCH WAND

FEATURES

- Stainless steel wand with brass fittings.
- Fits any Soprema burner.

PART#	PRODUCT NAME
88-133	5" S-TYPE TORCH WAND
88-134	15" S-TYPE TORCH WAND
88-135	24" S-TYPE TORCH WAND

STAINLESS STEEL BURNERS

Stainless steel torch burner.





88-121

FEATURES

- Stainless steel for long-lasting durability.
- Cost-effective alternative to titanium burners.

PART#	PRODUCT NAME
88-120	35 MM STAINLESS TORCH BURNER (61,700 BTU)
88-121	45 MM STAINLESS TORCH BURNER (152,100 BTU)
88-122	55 MM STAINLESS TORCH BURNER (246,300 BTU)
88-123	65 MM STAINLESS TORCH BURNER (407,400 BTU)

	88-120	88-121	88-122	88-123
DIAMETER (MM)	35	45	55	65
WEIGHT (G/LB/OZ)	200/0.44/7	200/0.44/7	200/0.44/7	400/0.88/14
PRESSURE (PSI/BAR)	21-58/1.4-4	21-58/1.4-4	21-58/1.4-4	21-58/1.4-4
MAX FLOW (G/HR)	1312	3250	5235	8670
KW	18.1	44.6	72.2	119.4
вти	61,700	152,100	246,300	407,400

TITANIUM BURNERS

Titanium torch burners made to last extra long.





88-301

- Cool down rapidly.
- Extremely lightweight.

PART#	PRODUCT NAME
88-300	50 MM TITANIUM TORCH BURNER (184,100 BTU)
88-301	60 MM TITANIUM TORCH BURNER (348,100 BTU)
88-302	70 MM TITANIUM TORCH BURNER (511,500 BTU)

	88-300	88-301	88-302
DIAMETER (MM)	50	60	70
WEIGHT (G/LB/OZ)	90.5/0.2/3.2	92.5/0.2/3	122/0.3/4
PRESSURE (PSI/BAR)	21-58/1.4-4	21-58/1.4-4	21-58/1.4-4
MAX FLOW (G/HR)	3911	7394	10864
кw	54	102	150
вти	184,100	348,100	511,500

EXPRESS BURNERS

Titanium torch burners designed for professional roofing, pavement and road repairs.



GE-150T

FEATURES

- Durable and ergonomic.
- Lightweight with high heat output.

PART#	PRODUCT NAME
GE-50T	50 MM EXPRESS TITANIUM TORCH BURNER (184,000 BTU)
GE-100T	60 MM EXPRESS TITANIUM TORCH BURNER (348,000 BTU)
GE-150T	70 MM EXPRESS TITANIUM TORCH BURNER (511,500 BTU)

SINGLE FLINT SPARK LIGHTER

The professional choice for lighting propane and acetylene torches.





88-413

FEATURES

- Durable spring steel handle with corrosion resistant finish.
- Carbon steel striker.

PROPANE HOSES

UL Listed and CSA approved propane hose.





88-415

QUICK CONNECT COUPLER SET

Quick connect coupler set for low-pressure propane systems.





88-500

FEATURES

- Durable and weather resistant.
- ¼" NPT brass fittings on both ends.

PART#	PRODUCT NAME
88-415	25' PROPANE HOSE
88-416	50' PROPANE HOSE
88-417	100' PROPANE HOSE

- Convenient connect/disconnect method.
- Easy to install.
- Rated to 60 psi.

PART #	PRODUCT NAME
88-500	QUICK CONNECT COUPLER SET (1 FEMALE, 1 MALE)
88-502	3 PC QUICK CONNECT COUPLER SET (1 FEMALE, 2 MALE)

STAINLESS STEEL TORCH HOLDER

Small bracket that attaches to propane torch to hold it up when it is not in use.





88-402

15" TITANIUM FIELD TORCH

Ready-to-use field roofing torch with a titanium burner for high heat applications and long-lasting durability.



FEATURES

- Durable stainless steel construction.
- Small and lightweight.
- Easy installation.

FEATURES

- 88-126 | 15" Hybrid Wand.
- 88-301 | 60 mm Titanium Burner.
- 88-402 | Stainless Steel Torch Holder.

20" TITANIUM FIELD TORCH

Ready-to-use field roofing torch with a titanium burner for high heat applications and long-lasting durability.



24" TITANIUM FIELD TORCH

Ready-to-use field roofing torch with a titanium burner for high heat applications and long-lasting durability.



FEATURES

- 88-128 | 20" Hybrid Wand.
- 88-302 | 70 mm Titanium Burner.
- 88-402 | Stainless Steel Torch Holder.

- 88-127 | 24" Hybrid Wand.
- 88-302 | 70 mm Titanium Burner.
- 88-402 | Stainless Steel Torch Holder.

5" TITANIUM DETAIL TORCH

Ready-to-use detail roofing torch with a titanium burner for high heat applications and long-lasting durability.



88-203

FEATURES

- 88-125 | 5" Hybrid Wand.
- 88-300 | 50 mm Titanium Burner.
- 88-402 | Stainless Steel Torch Holder.

ADJUSTABLE WRENCHES

Our adjustable wrenches are made from drop-forged steel with a corrosion resistant coating. They also feature a wide cushion grip for maximum comfort.



02-335

FEATURES

- Drop-forged steel.
- Chrome Vanadium coating for rust and corrosion resistance.
- Non-slip grip.

PART#	PRODUCT NAME
02-332	6" ADJUSTABLE WRENCH
02-333	8" ADJUSTABLE WRENCH
02-334	10" ADJUSTABLE WRENCH
02-335	12" ADJUSTABLE WRENCH

PIPE WRENCHES

Primegrip heavy duty aluminum wrenches provide contractor grade strength in lightweight.



02-284

FEATURES

- 50% lighter than identical cast iron models.
- Tapered handle, better grip and weight distribution.
- Drop-forged heat treated steel jaws, adjustment nut.
- SAE width markings for quick reference.

PART#	PRODUCT NAME
02-234	14" ALUMINUM PIPE WRENCH
02-235	18" ALUMINUM PIPE WRENCH

5 LB CUTTER MATTOCK HEAD

Replacement cutter mattock head for damaged tools.



ASH PICK HANDLE

For use with 06-402—5 lb Cutter Mattock Head.



69-461

FEATURES

- Made from drop-forged and tempered steel.
- 5 lb head weight.
- Features an axe blade for cutting and an adze blade for digging.

FEATURES

06-402

- 36" pick handle.
- Ash wood construction.
- Proudly made in Canada.

SPUD BARS

Spud bar with 57" D-grip. Ideal for removal of gravel, slag, old roofing, etc. Blades sold separately.





06-865

06-867

FEATURES

- Welded steel for maximum strength.
- Ideal for removal of gravel, slag, old roofing, etc.
- Replaceable pre-hardened carbon steel blades.
- Heat-treated flexible blades resist breaking.

PART#	PRODUCT NAME
06-865	3½" SPUD BAR
06-866	7" SPUD BAR
06-867	3½" SPUD BAR BLADE
06-868	7" SPUD BAR BLADE

Roofer's general purpose garbage tarp.



38-0707


FEATURES

- Constructed from heavy duty canvas and high strength vinyl coated mesh.
- Treated for rot, mould/mildew, and water resistant for wet applications.
- Heavy duty stitched hems and seams.
- High strength and UV resistant thread.
- 2" seatbelt webbing reinforcement.
- Forged D-rings at each corner.

PART#	PRODUCT NAME
38-0707	7×7' GARBAGE TARP
38-1010	10×10' GARBAGE TARP

VERTICAL GUARD RAIL POST

Easy to assemble vertical guard rail for securing flat roof perimeter.



- Oven-baked paint for long-lasting surface protection.
- Complies with OSHA standards and guidelines.
- Steel rails installed at 8' intervals, saving time and reducing the number of posts required.
- Can be installed by screwing directly into roof facing.



From our humble beginnings with a single three-inch hand seamer, our metal and siding tool lines have expanded over the years to become a force in the market. As of the launch of our standing seam panel benders in 2022, we have comprehensive offerings for standing seam metal roofing, siding, soffit/fascia work and have even acquired outstanding success in the HVAC market.

SEAMERS SNIPS

CRIMPERS WIRE STRIPPERS

HAMMERS NOTCHERS

FIRST STAGE HAND SEAMER

Used to make the first bend in locking the leg on the metal standing seam.



03-520

FINISHING HAND SEAMER

Designed to be used in conjunction with First Stage Hand Seamer to close the second bend of a double standing seam.



03-521

FEATURES

- Bends up to 24 gauge metal.
- Size and lightweight design enables vertical and horizontal seam locking.
- For seams ½" across and ¾" on the down leg.
- Works on 1" and 1½" high standing seams.
- Painted powder-coated finish for durability.

FEATURES

- Finishes second bend of the double standing seam.
- For seams measuring ½" across on the top leg.
- Ergonomic design provides excellent comfort.

FOLDING BARS

Designed as two steel plates welded together with slits running along the length. Perfect for 3/8" and 1" bends.



03-533


- Easy-to-use folding mechanism for metal sheets.
- Handy sight holes assure proper depth alignment.
- ¾" and 1" bend depths.

PART#	PRODUCT NAME
03-532	12" FOLDING BAR
03-533	18" FOLDING BAR
03-534	24" FOLDING BAR



STANDING SEAM HEMMING TOOLS

Primegrip hemming tools are designed to facilitate the quick and precise hemming of metal panel edges for standing seam roofs and can also be used to close the high side of panels. Constructed from 10 gauge mild steel, feature high quality spot welding and a heat-treated powder-coated finish.



03-563



FEATURES

- Makes 1" or 1½" bends in metal panels up to 20" wide.
- 1/8" throat gap allows use with up to 15 gauge material.
- 12" handle with double layer cushion grip for smooth and effortless work.
- 10 gauge mild steel construction with heat-treated powder-coated finish for strength and durability.

PART#	WIDTH (THROAT LENGTH)	BEND DEPTH (THROAT)	THROAT GAP	MAX. MATERIAL THICKNESS
03-560	15¼"	1"	1/8"	15 GAUGE
03-561	17¼"	1½"	1/8"	15 GAUGE
03-562	19"	1½"	1/8"	15 GAUGE
03-563	20"	1½"	1/8"	15 GAUGE

DRIP EDGE BENDERS

High leverage Drip Edge Benders are designed to make bends in metal panel edges. Can be easily used overhead on installed panels to bend up to 18 gauge material due to the lightweight build. Constructed from 14 gauge mild steel, feature high quality spot welding and a heat-treated powder-coated finish.



03-564

- Ideal for bending panel edges to create drip edges, can be used overhead or on a workbench for pre-bending.
- Make 1" or 1½" bends.
- 2 mm throat gap allows use with up to 18 gauge material.
- Bar-shaped handle allows two-handed use for extra leverage.
- 14 gauge mild steel construction, heat-treated powder coating.

PART#	PRODUCT NAME
03-564	18" DRIP EDGE BENDER
03-565	24" DRIP EDGE BENDER

FORGED ALUMINUM SEAMERS

For making clean and accurate bends, seams and folds or for flattening and straightening metal sheets.



03-526

3" HAND SEAMER

Drop-forged steel seamer for sheet metal applications.



03-535

FEATURES

- Bowed die-cast aluminum jaws for firm and even hold.
- ¼" jaw depth increments, maximum 2" bend depth.
- Rust-resistant nickel plating. Contoured grip.

PART#	PRODUCT NAME
03-525	3" FORGED HAND SEAMER
03-526	6" FORGED HAND SEAMER
03-527	9" FORGED HAND SEAMER

FEATURES

- 1" bend depth.
- Useful for thicker gauge material.
- High quality drop-forged steel.

3" CHROME SEAMER

Steel seamer for sheet metal applications. Chrome coated jaws for rust protection.



03-537



- 1" bend depth.
- Useful for thicker gauge material.
- High quality drop-forged steel.
- Double layered and non-slip handles.
- 1/4" graduation markings for easy reference.

DOUBLE-LAYERED SEAMERS

Our flagship tool line in the sheet metal bender category, these seamers are individually drop-forged by hand from the highest quality steel. They feature a springless design that will never lose its clamp strength and a foam grip that is gentle on the hands even with prolonged use.

#NOSPRINGSATTACHED

DOUBLE-LAYERED ANGLED SEAMERS

Professional series hand seamers with comfortable double-layered non-slip handles and long-lasting heat-treated steel jaws.



03-530



03-531

FEATURES

- Seamer angles allow accurate 45° / 90° bends and ease of use in tight areas.
- 1" bend depth.
- Useful for thicker gauge material.
- No springs so seamer jaw does not lose strength.
- High quality drop-forged steel, fully heat-treated and tempered.
- Double layered and non-slip handles.

PART#	PRODUCT NAME
03-528	1"×3" DOUBLE LAYERED HAND SEAMER—45°
03-529	1"×3" DOUBLE LAYERED HAND SEAMER—90°
03-530	1"×6" DOUBLE LAYERED HAND SEAMER—45°
03-531	1"×6" DOUBLE LAYERED HAND SEAMER—90°

DOUBLE-LAYERED SEAMERS

Professional series hand seamers with comfortable double-layered non-slip handles and long lasting heat-treated steel jaws.







03-539







03-547

- Useful for thicker gauge material.
- No springs so seamer jaw does not lose strength.
- High quality drop-forged steel.
- Fully heat-treated and tempered.
- Double layered and non-slip handles.

PART#	PRODUCT NAME
03-536	1"×3" HAND SEAMER
03-539	1"×6" HAND SEAMER
03-540	1"×9" HAND SEAMER
03-541	1"×12" HAND SEAMER
03-546	2"×6" HAND SEAMER
03-547	3"×6" HAND SEAMER
03-549	2"×3" HAND SEAMER

180° CLINCHER

Clinching pliers for all kinds of sheet metal applications.



03-542

45° CLINCHER

Clinching pliers for all kinds of sheet metal applications.



FEATURES

- High quality, heavy duty forged tools.
- Precoated handles.
- Manufactured to precise standards.

FEATURES

- High quality, heavy duty forged tools.
- Precoated handles.
- Manufactured to precise standards.
- Provides more leverage than a straight pair of tongs.

90° CLINCHER

Clinching pliers for all kinds of sheet metal applications.



03-544

- High quality, heavy duty forged tools.
- Precoated handles.
- Manufactured to precise standards.
- Useful for hard to reach bends.

AVIATION SNIPS

Ideal snips for cutting light stock.







36-317 36-318 36-319

FEATURES

- High-quality chrome-vanadium alloy steel.
- Rubber comfort grip handles and safety latch.
- Non-slip serrated jaws for efficient cutting.
- Spring action for fast, effortless feed.
- Standardized handle colours are easy to identify.

PART#	PRODUCT NAME
36-317	STRAIGHT CUT AVIATION SNIPS
36-318	LEFT CUT AVIATION SNIPS
36-319	RIGHT CUT AVIATION SNIPS

OFFSET AVIATION SNIPS

Ideal snips for cutting light stock with offset jaws to keep hands up and away from sharp metal edges.







36-327 36-328 36-329

FEATURES

- Cut 18 gauge cold-rolled steel and 22 gauge stainless steel.
- Chrome-molybdenum alloy steel forged blades with serrated edges for strength and durability.
- Offset blades keep hands safely away from material and provide increased reach in tight situations.
- Comfortable non-slip handles.
- Quick and simple spring-free automatic latch design.

PART#	PRODUCT NAME
36-327	OFFSET LEFT AVIATION SNIPS
36-328	OFFSET STRAIGHT AVIATION SNIPS
36-329	OFFSET RIGHT AVIATION SNIPS

OFFSET LONG CUT AVIATION SNIPS

Offset snips with 3" blades ideal for long cuts.



36-323



36-324

FEATURES

- Cut straight and left curves in 20 gauge cold-rolled steel and 24 gauge stainless steel.
- Chrome-molybdenum alloy steel forged blades with serrated edges for strength and durability.
- Offset blades keep hands safely away from material.
- Comfortable non-slip handles.
- Quick and simple spring-free automatic latch design.

PART#	PRODUCT NAME
36-323	OFFSET LONG CUT LEFT AVIATION SNIPS
36-324	OFFSET LONG CUT RIGHT AVIATION SNIPS

VERTICAL OFFSET AVIATION SNIPS

Vertical offset snips ideal for increased reach in overhead projects, tight spaces or ground level cutting.



36-325



36-326

- Cut straight and left curves in 24 gauge cold-rolled steel and 28 gauge stainless steel.
- Chrome-molybdenum alloy steel forged blades with serrated edges for strength and durability.
- Offset blades keep hands safely away from material and provide increased reach in tight situations.
- Comfortable non-slip handles.
- Quick and simple spring-free automatic latch design.

PART#	PRODUCT NAME
36-325	VERTICAL OFFSET LEFT AVIATION SNIPS
36-326	VERTICAL OFFSET RIGHT AVIATION SNIPS

DRILL-OPERATED AVIATION SNIPS

Converts a power drill into aviation snips. Has applications in metal roofing, building panels, metal duct work and sheet metal. Comes as a complete kit.



36-320

FEATURES

- Aviation snip attachment
- 1 nut, 3 screws, 2 drill clamps.
- 1 soft-grip handle.
- 5 mm hex key wrench, 10 mm combination wrench.

12" ALUMINUM COMPOUND SCISSORS

Ideal for vinyl siding and can be used to cut sheet metal, roofing materials, carpet, plastic and canvas.



36-373

FEATURES

- Cuts straight, right and left curves in up to 22 gauge cold-rolled steel.
- 3" cutting length for fast shear.
- Protruding blade allows tight and precise cuts.
- Multiple handle openings to accommodate different hand sizes.

ALUMINUM SCISSORS

Ideal for vinyl siding and can be used to cut sheet metal, roofing materials, carpet, plastic and canvas.



36-374

TINSNIPS

Ideal for cutting low carbon cold-rolled steel. Cut straight and wide curves when trimming light gauge stock.



36-354

FEATURES

- Cuts straight, right and left curves in up to 22 gauge cold-rolled steel.
- 3" cutting length for fast shear.
- Multiple handle openings to accommodate different hand sizes.
- Rugged and lightweight aluminum design.

PART#	PRODUCT NAME
36-374	12" ALUMINUM SCISSORS
36-375	14" ALUMINUM SCISSORS

FEATURES

- Flat inside edge face guides tool along a straight line.
- Cushion grip for comfort.
- Hand-edged hot drop-forged steel blades.
- Long lasting and rust-resistant.

PART#	PRODUCT NAME
36-352	8" TINSNIPS
36-353	10" TINSNIPS
36-354	12" TINSNIPS

MULTI-PURPOSE SHEARS

Ideal for cutting sheet metal and leather.







36-482

FEATURES

- Stainless steel serrated blade.
- Lightweight and durable anti-slip handles for a comfortable grip.
- Adjustable range blade.

PART#	PRODUCT NAME
36-480	8" MULTI-PURPOSE SHEARS
36-482	10" MULTI-PURPOSE OFFSET SHEARS

8" MULTI-FUNCTION SCISSORS

Ideal for cutting sheet metal, plastic and leather.



36-481

- Stainless steel serrated blade.
- Includes box cutter, wire cutter, nut cracker and jar opener.
- Includes plastic sheathe.

Makes tabs in the cut edge of a siding panel used as a finishing course at the top of a wall or below a window.



SIDING REMOVER

This compact siding removal tool combines the comfort and leverage of an easy-to-hold handle with the smooth unlocking motion of a burr free hook.



36-102

33-640

FEATURES

- All steel construction. Forged cutting jaw holds edge longer and assures a burr free cut.
- Punch impression spaced ¾" from edge of metal.
- Non-slip vinyl cushion handle for a comfortable grip.

PART#	PRODUCT NAME
33-640	SNAP LOCK PUNCH
33-643	SNAP LOCK PUNCH—EASY HANDLE

FEATURES

- Angled blade for wrist and knuckle protection.
- Blade finish prevents sharp hook from producing shavings or cutting vinyl material.
- Non-slip textured ergonomic handle.
- Durable spring steel construction.

PART#	PRODUCT NAME
36-101	SIDING REMOVER—CURVED HANDLE
36-102	SIDING REMOVER—STRAIGHT HANDLE

HARDIBOARD BLADES

Circular saw blade designed for use with mitre saws.



22-880

ALUMINUM FOAM GUN

Lightweight foam gun for insulation applications.



45-165

FEATURES

- Polycrystalline diamond technology blade that provides durability and longer cutting life.
- Ensures over 1,000 cuts per blade.
- Self-sharpening for precise, dust-reducing cuts.
- Ideal for multi-plank cutting, ripping, cross-cutting and mitering in fiber cement boards and siding.

PART#	PRODUCT NAME
22-880	7¼"×4T HARDIBOARD BLADE
22-881	10"×6T HARDIBOARD BLADE

- Excellent bead control.
- Professional results.
- Lightweight body.

HAND NOTCHER

This sheet metal hand tool makes a 30° V corner notch for hand fabricating rectangular metal duct work.



33-641

SHEET METAL CRIMPER

Perfect crimps for tighter fitting, leakproof connections.



33-700

FEATURES

- All steel construction and forged cutting jaw.
- Non-slip cushion grips and spring loaded handles with locking jaw.

FEATURES

- Non-slip vinyl cushion grip.
- All steel construction.

5-BLADE OFFSET CRIMPER

Crimping tool for gutters, ducts, metal pipes, etc.



33-703

18 OZ TINNER'S HAMMER

The perfect hammer for light to medium duty jobs and works well for striking common and finishing nails.



04-880

FEATURES

- Offset blade keeps hand safely away from material.
- Optimized handle span for maximum power and comfortable operating range.
- Non-slip cushion grips for superior comfort and control.
- Safety latch for keeping blades closed.

- Forged single piece steel head and handle for unsurpassed strength and durability.
- Finely polished head creates a smooth surface.
- Bonded shock reduction grip reduces shock significantly and lowers hand and arm fatigue.

METAL MADE EASY



STANDING SEAM
HEMMING
SIDING
HVAC



Few materials lend as much class to a roof as slate. Working with a premium slate roofing system requires tools of the highest calibre. At Primegrip we have a curated selection of tools designed specifically for the slate roofer. Our carefully selected products are focused on professional quality and utmost usability.

HAMMERS RIPPERS

TRIMMERS BRACKETS

SPUDDERS STAKES

SLATE HAMMER

All-in-1 slate hammer—a lightweight, multi-purpose tool that can trim slate, drive or pull nails and punch holes.



04-820

SLATE RIPPER

Innovative tool specially designed for slate removal.



09-272

FEATURES

- Milled hammer face reduces chances of missing nails.
- Spike for punching holes and weakening slate. Nail puller for removing nails.
- Beveled shank for slate trimming.
- Forged medium carbon steel head with satin polish.
- Nylon and thermoplastic rubber handle.

FEATURES

- Thin mid-section for sliding under slates without breaking.
- Reinforced handle allows harder hammer strikes for removing slate nails effortlessly.
- 24" blade length makes this the best ripper for longer nail removal.

SLATE CUTTER & TRIMMER

This slate cutter makes straight, as well as concave and convex cuts, leaving a professional chamfered edge.



09-273

STRAIGHT SLATE STAKE

Used in conjunction with a slate hammer to trim slate.



09-275

FEATURES

- Adept at cutting smaller pieces to be fitted around chimney or valley of roof.
- The tough, heat treated blade and the punch are removable and can be reordered.
- The variable pitch of the curved blade gives excellent "bite" on the toughest slate varieties up to 3/8" thick.

- Flat bar stock, welded construction.
- Offers forged pointed end to be driven into a wooden surface, therefore providing stable edge for trimming slate with a slate hammer.
- 20" wide with 8" stake.

HAND SPUDDER

Ideal for removing slate roofing.



06-860

FEATURES

- Also removes gravel and slag, old roofing and fastenings.
- Pre-hardened blades for improved wear resistance.
- Quick change replacement blades.
- All steel construction.

SLATE ROOFING BRACKET

An all-round, full capacity roofing bracket for 2"×12" planks, made specifically for on and over slate work.



73-320

- Adjusts and locks to six positions to fit 33°, 38°, 43°, 48°, 50°, 55° pitch.
- Galvanized steel for strength, safety and durability.
- Folds compactly for easy storage.
- Capacity: one person per 8' of staging plus 40 lb.
- Complies with OSHA regulations.



Every year in Canada, more than 40,000 workers are injured and lose time due to fall accidents when working at heights. We encourage our customers and business partners to join us in our #TARGETZERO initiative to provide easy and cost-effective access to the highest quality safety equipment, educate the trades on its use and encourage workers to never take their safety for granted.

ANCHORS

LANYARDS LIFELINES

KNEE PADS SAFETY JACKETS

D-MINUS ANCHOR KIT

Economical fall arrest anchor. Ultra low profile, specified for asphalt shingle roofing. Used for new construction, reroof or retrofitting onto existing roofs.



23-408

FEATURES

- Installs with just 6 fasteners in 5 certified pre-engineered fastener options.
- Fall Indicator stem warns of in-service loading.
- Paintable to match any roofing color.
- Accepts all 3,600 lb gate strength connectors.
- OSHA 5,000 lb rated.

REUSABLE ANCHOR

Used to provide a temporary, reusable anchor point for residential construction applications. Approved for use on both wood and metal roofing.



23-413

FEATURES

- 14 Gauge reusable steel anchor with clear chromate finish.
- Meets OSHA 1926.502(d)(16)(v) requirements.
- Must be used only with approved components that limit the fall arresting forces to 900 lb or less.
- Support structure at anchor site must be capable of supporting a 5,000 lb static load.

HEAVY DUTY ANCHORS

Reusable, easy to install anchor point.



RETROFIT ANCHORS

Designed to be installed by removing only a portion of the ridge. Conventional flashing system not required.



23-416

23-418

FEATURES

- Compatible with both wood and steel substrates.
- Special hole configuration for a safer and more convenient installation of fasteners.
- Can be installed with screws or duplex nails.
- Fits up to 12/12 roof pitch.
- Fasteners provided.

PART#	PRODUCT NAME
23-415	SINGLE PLATE HEAVY DUTY ANCHOR
23-416	DUAL PLATE HEAVY DUTY ANCHOR

- Works with vented & non-vented ridge caps.
- Perfect for asphalt, wood & metal roofs.
- Butyl strip flashing included.
- Low profile design can be painted to match roof.
- Complies with all OSHA and ANSI standards.
- Includes stainless steel fasteners.

PART#	PRODUCT NAME
23-417	SINGLE RING RETROFIT ANCHOR
23-418	DOUBLE RING RETROFIT ANCHOR

7¾" SINGLE D-RING RETROFIT ANCHOR

D-ring anchor designed for permanent or temporary use. The length is ideal for shingle type roofs allowing the anchor to be attached over the roofing material.



23-406

2×4 CLAW TYPE ANCHOR KIT

Permanent fall protection anchor to be fixed to wood or steel framed top chords, or other framing members.



23-426

FEATURES

- Works with vented and non-vented ridge caps, ideal for use on hip corners, ridgelines, shed roofs and other nonstandard areas.
- Perfect for asphalt, wood and metal roofs. The low profile design can be painted to match the roof.
- Stainless steel fasteners and butyl strip flashing included.
- Rated for one person in fall arrest or fall restraint with a maximum combined weight of 310 lb (140 kg).
- Designed to meet or exceed CSA, OSHA and ANSI standards.

FEATURES

- Permanent anchor point to be installed on 2x4 framing members.
- 430 stainless steel 11 gauge body with a minimum tensile strength of 5,000 lb (22.5 kN).
- 100% waterproof with PVC flashing system and cover cap for stem included.
- Rated for one person in fall arrest or fall restraint with a maximum weight of 340 lb (154 kg).
- Designed to meet or exceed CSA, OSHA and ANSI standards.

CONCRETE ANCHOR STRAP

Concrete anchor strap that can be installed as a permanent anchor during building construction, and can also be used in temporary applications, such as wood framing, rebar work, or pipe racking.



23-608

FEATURES

- Easy to install. Lightweight and durable.
- Manufactured from polyester and galvanized steel.
- Sheathed in heavy duty nylon webbing.
- Compatible with horizontal lifelines.

PART#	PRODUCT NAME
23-607	3' CONCRETE ANCHOR STRAP
23-608	4' CONCRETE ANCHOR STRAP
23-609	6' CONCRETE ANCHOR STRAP
23-610	6' CONCRETE ANCHOR STRAP SINGLE D-RING
23-614	6' CONCRETE ANCHOR STRAP DOUBLE D-RING

PREMIUM CROSS ARM STRAP


The premium cross arm strap is a reusable anchor point that can be used in a variety of fall protection applications.



23-611

3'×2" WEBSTRAP SLING

Excellent option for use where other types of anchor points can not be installed.



23-602

FEATURES

- Easy to install.
- Lightweight and durable.
- Manufactured from polyester and galvanized steel with reinforced webbing for superior durability and functionality compared to standard models.

PART #	PRODUCT NAME
23-611	3' PREMIUM CROSS ARM STRAP
23-612	4' PREMIUM CROSS ARM STRAP
23-613	6' PREMIUM CROSS ARM STRAP

FEATURES

- Strong and durable 2-ply high strength webbing.
- Lightweight, portable, highly resistant to abrasion.
- 5,000 lb fall arrest anchor for one user.

5 ADJUSTMENT POINT HARNESS

This Class-A fall arrest harness utilizes a 1¾" polyester webbing that is supremely strong and durable. It incorporates a dorsal D-ring certified for fall arrest, 5 independent points of adjustment and pass-through leg connections. It is CSA certified and compliant with OSHA and ANSI regulations.

CLASS A

FEATURES

- Extremely strong and durable 1¾" polyester webbing.
- 5 independent adjustment points.
- Back D-ring certified for fall arrest.
- 23-103 has class P compliant lateral D-rings for work positioning.
- 23-105 has grommet leg connections instead of quick connect buckles.
- Pass-through leg and chest connections.
- CSA Z259.10 certified, OSHA & ANSI compliant.
- Universal small large size.

PART #	PRODUCT NAME
23-101	WARRIOR HARNESS
23-103	GLADIATOR HARNESS WITH SIDE D-RINGS
23-105	RENEGADE HARNESS WITH GROMMET LEG STRAPS



23-103

The flagship harness of the Primegrip safety line, the Juggernaut is designed to strike the perfect balance between comfort, utility and style. Juggernaut offers unrivaled softness and flexibility. The complete wrap-around waist strap supports the core and is overlaid with a heavy duty 2" polyester belt that can be fitted with your favourite tool pouches.



FEATURES

- High strength 600D polyester webbing.
- EVA foam core padding throughout harness frame.
- Wrap-around waist strap.
- 2" overlaid utility belt for use with tool pouches.
- Convenient quick-connect chest and leg connections featuring green spot connection indicator.
- Quick-adjust vertical chest straps equipped with keeper loops to park your lanyard when not in use.
- Primegrip TRU-VIS reflective strips for visibility.
- Dual fall indicators.
- Available with or without tools bags.







WITHOUT BAGS





	±2" ±5cm	MIN HARNESS HEIGHT	MAX HARNESS HEIGHT	MIN BELT LENGTH	MAX BELT LENGTH
23-040	s	34" 87 CM	40" 102 CM	28" 72 CM	42" 106 CM
23-041	М	36" 92 CM	42" 107 CM	32" 82 CM	47" 120 CM
23-042	L	38" 97 CM	44" 112 CM	32" 82 CM	47" 120 CM
23-043	L LONG	38" 97 CM	48" 122 CM	32" 82 CM	52" 133 CM
23-044	XL	41" 105 CM	54" 138 CM	40" 102 CM	63" 160 CM
23-045	XL LONG	44" 112 CM	61" 155 CM	47" 120 CM	63" 160 CM

WITH BAGS





	±2" ±5cm	MIN HARNESS HEIGHT	MAX HARNESS HEIGHT	MIN BELT LENGTH	MAX BELT LENGTH
23-046	s	34" 87 CM	40" 102 CM	28" 72 CM	42" 106 CM
23-047	М	36" 92 CM	42" 107 CM	32" 82 CM	47'' 120 CM
23-048	ı	38" 97 CM	44" 112 CM	32" 82 CM	47" 120 CM
23-049	LONG	38" 97 CM	48" 122 CM	32" 82 CM	52" 133 CM
23-050	XL	41" 105 CM	54" 138 CM	40" 102 CM	63" 160 CM
23-051	XL LONG	44" 112 CM	61" 155 CM	47" 120 CM	63" 160 CM

GETZERO:fal TO LEARN MORE GO TO PRIMELINETOOLS.COM/TARGETZERO



COLOSSUS TRU-VIS Utility Harness

The flagship harness of the Primegrip safety line, the Colossus is designed to strike the perfect balance between comfort, utility and style. Colossus offers unrivaled softness and flexibility. The complete wrap-around waist strap supports the core and is overlaid with a heavy duty 2" polyester belt that can be fitted with your favourite tool pouches.



FEATURES

- High strength 600D polyester webbing.
- EVA foam core padding throughout harness frame for outstanding comfort.
- Wrap-around waist strap.
- 2" overlaid utility belt for use with tool pouches.
- Convenient quick-connect chest and leg connections featuring green spot connection indicator.
- Quick-adjust vertical chest straps equipped with keeper loops to park your lanyard when not in use.
- Primegrip TRU-VIS reflective strips for visibility in the most dimly lit environments.
- Dual fall indicators.
- Available with or without tools bags.

WITHOUT BAGS











	±2" ±5cm	MIN HARNESS HEIGHT	MAX HARNESS HEIGHT	MIN BELT LENGTH	MAX BELT LENGTH
23-052	L/G	38" 97 CM	44" 112 CM	32" 82 CM	47" 120 CM
23-053	XL/TG	41" 105 CM	54" 138 CM	40" 102 CM	63" 160 CM

WITH BAGS



	±2" ±5cm	MIN HARNESS HEIGHT	MAX HARNESS HEIGHT	MIN BELT LENGTH	MAX BELT LENGTH
23-054	L/G	38" 97 CM	44" 112 CM	32" 82 CM	47" 120 CM
23-055	XL/TG	41" 105 CM	54" 138 CM	40" 102 CM	63" 160 CM



PALADIN TRU-VIS Utility Harness

The Paladin is a worker favourite. It is designed to strike the perfect balance between comfort, utility and style. Paladin offers unrivaled comfort and support. The waist strap features an ergonomic padded design to support your mid to lower back and is overlaid with a heavy duty 2" polyester belt that can be fitted with your favourite tool pouches.

FEATURES

- High strength 600D polyester webbing.
- Porous fabric shoulder pad design.
- EVA foam core padding on shoulders and upper back.
- Ergonomic EVA foam-padded waist strap.
- 2" overlaid utility belt for use with tool pouches.
- Convenient quick-connect chest connection featuring green spot connection indicator.
- Quick adjust vertical chest straps equipped with keeper loops to park lanyard when not in use.
- Primegrip TRU-VIS reflective strips for unrivaled visibility.
- Dual fall indicators.



	±2" ±5cm	MIN HARNESS HEIGHT	MAX HARNESS HEIGHT	MIN BELT LENGTH	MAX BELT LENGTH
23-060	S/P	26" 67 CM	40'' 102 CM	28" 72 CM	42" 106 CM
23-061	M/M	28" 72 CM	43" 110 CM	32" 82 CM	46" 117 CM
23-062	L/G	30" 77 CM	46" 117 CM	36" 92 CM	50" 127 CM
23-063	XL/TG	32" 82 CM	50" 127 CM	40" 102 CM	52" 133 CM
23-064	XXL/TTG	34" 87 CM	57'' 145 CM	44" 112 CM	58" 148 CM

COMMANDER TRU-VIS Utility Harness

The Commander is a lightweight and durable harness. Ideal for any construction worker, it features a high strength 600D polyester webbing frame equipped with the Primegrip TRU-VIS reflective strip. The soft padded waist belt provides core support and is overlaid with a 2" utility belt for your favourite pouches.

FEATURES

- High strength 600D polyester webbing.
- Removable shoulder pad can be washed.
- Padded waist belt supports worker core abdominal muscles and is overlaid with a 2" overlaid utility belt for use with tool pouches.
- Convenient quick-connect chest and leg connections featuring green spot connection indicator.
- Quick-adjust vertical chest straps equipped with keeper loops to park your lanyard when not in use.
- Primegrip TRU-VIS reflective strips for unrivaled visibility.
- Dual fall indicators.
- Size fits Medium Large.











23-115

CRUSADER TRU-VIS Utility Harness

The Crusader harness is lightweight, well-padded, and stylish. This harness features ultra-flow padding throughout the frame and belt for maximum breathability and comfort. The complete wrap-around belt supports the core and is equipped with a heavy duty 2" polyester belt that can be fitted with your favourite tool pouches.

FEATURES

- Breathable and soft foam padding throughout harness frame and belt.
- 2" overlaid utility belt for use with tool pouches.
- Quick-adjust vertical chest straps equipped with keeper loops to park your lanyard when not in use.
- Wrap-around waist strap.

- Quick connect buckles on the leg and chest straps with green spot connection indicator.
- Primegrip TRU-VIS reflective strips for unrivaled visibility.
- Available in 3 sizes: Small, Medium-Large and Large-Extra Large, and with or without tool bags.

WITHOUT BAGS





CLASS A





	±2" ±5cm	MIN HARNESS HEIGHT	MAX HARNESS HEIGHT	MIN BELT LENGTH	MAX BELT LENGTH
23-147	s	34" 87 CM	40" 102 CM	40" 102 CM	47" 120 CM
23-148	M–L	36" 92 CM	42" 106 CM	43" 109 CM	58" 148 CM
23-149	L–XL	41" 104 CM	53" 135 CM	47" 120 CM	63" 160 CM

WITH BAGS





	±2" ±5cm	MIN HARNESS HEIGHT	MAX HARNESS HEIGHT	MIN BELT LENGTH	MAX BELT LENGTH
23-153	s	34" 87 CM	40" 102 CM	40" 102 CM	47" 120 CM
23-154	M-L	36" 92 CM	42" 106 CM	43" 109 CM	58" 148 CM
23-155	L–XL	41" 104 CM	53" 135 CM	47" 120 CM	63" 160 CM

Primegrip tool pouches made for comfort and longevity with carefully designed compartments for optimized storage and a lightweight feel.



23-141

HAMMER HOLDER

Polyester fabric hammer holder.



23-143

FEATURES

- 9" deep pockets.
- Made from 600d polyester PVC-coated fabric.
- Hook and loop back for a secure fit.

PART#	PRODUCT NAME
23-141	2-POCKET TOOL POUCH
23-142	3-POCKET TOOL POUCH

FEATURES

- Made from 600d polyester PVC-coated fabric.
- Hook and loop back for a secure fit.

HARNESS PAD

Removable shoulder and back pad for harnesses.



23-538

TAKE THE WEIGHT OFF YOUR SHOULDERS

- Universal fit for any harness.
- Breathable nlyon construction.
- Soft and comfortable closed-cell foam inside.
- Hook and loop with buttons for simple and secure fit.

SHOCK-ABSORBING LANYARD

The standard dual snaphook shock absorbing lanyard forms an integral part of any personal fall arrest system.





DUAL HOOK SHOCK-ABSORBING LANYARD

This 6' single-legged shock absorbing lanyard includes a locking snap hook and a large locking rebar hook. This lanyard features a built-in woven inner core that expands in the event of a fall to reduce arrest forces.



23-162

FEATURES

P

- Highly durable. Easy to inspect.
- Snap hook ends.
- User capacity 68.1 140 kg (150 310 lb).
- CSA Z259.11 certified and OSHA/ANSI compliant.

PART#	PRODUCT NAME
23-171	3' SHOCK-ABSORBING LANYARD
23-172	6' SHOCK-ABSORBING LANYARD

FEATURES

- Built-in woven expanding core.
- Steel locking rebar hook and snap hook.
- Outer jacket that works as a back-up lanyard.
- Durable lightweight polyester materials.
- Warning flag that provides visual proof of a fall.
- CSA Z259.11 certified and OSHA/ANSI compliant.
- User capacity 100 254 lb.

6' TWIN SHOCK ABSORBING LANYARD

The twin-legged shock absorbing lanyard allows continuous connection (tie-off) while the user moves between anchoring locations.



23-163

ROPE GRAB WITH ABSORBER

This fall arresting device can be easily attached to any point on a lifeline, and features "hands-free" operation on weighted vertical safety lines. Compatible with 5/8" diameter rope.





23-202

FEATURES

- Easy to inspect.
- Highly durable.
- One snaphook and two rebar hooks.
- User capacity 68.1 140 kg (150 310 lb).
- CSA Z259.11 certified And OSHA/ANSI Compliant.

- Double-locking closing mechanism.
- Hinge design permits attachment anywhere on lifeline.
- Large ring for direct web attachment or snaphook connection.
- Moves freely along rope on brass rollers.
- Features a 2' external shock pack.
- CSA Z259.11 certified and OSHA/ANSI compliant.

SELF-LOCKING CARABINER

Self-locking carabiner for use with fall protection systems.



23-513

FEATURES

- Heat-treated alloy steel.
- 100% proof loaded to 3,600 lb.
- Meets ANSI Z359.12, CSA Z259.12, EN 362.
- Minimum breaking load 5,000 lb.
- Gate strength 3,600 lb.

SINGLE HOOK LIFELINES

3-strand vertical lifeline with single hook.



23-254

FEATURES

- Aluminum swage eye splice (3,600 lb gate strength and double locking snaphook) with adhesive PVC cover.
- Resists UV exposure, abrasion and water absorption.
- Can be used with mechanical and Prussic rope grabs.
- CSA Z259.2.5 certified and compliant with OSHA and ANSI standards.
- Rated for 10,582 lb.



PART#	PRODUCT NAME
23-254	25' SINGLE HOOK LIFELINE
23-255	30' SINGLE HOOK LIFELINE
23-263	50' SINGLE HOOK LIFELINE
23-264	100' SINGLE HOOK LIFELINE



GRAVITY CHECK.

Primegrip SRLs are used as part of a personal fall arrest, restraint, work positioning, suspension, or rescue system. They find applications in many situations where a combination of work mobility and fall protection is required, e.g; construction, inspection, maintenance, oil production, container work, confined space work, etc.

WE GOT IT COVERED

WEBBING SRL

Thermoplastic housing, stainless steel components and Aramid fiber webbing with Ultra-High-Molecular-Weight Polyethylene (UHMWPE) and polyester core make an ideal SRL for those who desire a compact and lightweight design.





- Quick-action braking system.
- Swivel top and side lifeline exit.
- Can be used with 23-520 and 23-521 connectors to create a multi-lifeline system.
- Multiple hook configurations available: self-locking snap hook and rebar hook.
- Designed to meet and exceed the requirements of ANSI Z359.14-2014 CLASS A SRL.

PART#	PRODUCT NAME
23-280	6' SRL WITH SNAP HOOK
23-281	6' SRL WITH REBAR HOOK
23-282	12' SRL WITH SNAP HOOK

CABLE SRL

Uses a galvanized steel cable wire, making it the ideal choice for durability. Available in both aluminum or thermoplastic housings, in a variety of lengths.



FEATURES

- Rugged aluminum housing, non-corrosive stainless steel components and galvanized steel cable wire.
- Quick-action braking system.
- Swivel top.
- Side lifeline exit with rubber (TPV) ergonomic handle.
- Internal energy absorption system.
- Multiple hook configurations available: self-locking snap hook on lifeline.
- Designed to meet and exceed the requirements of ANSI Z359.14-2014 CLASS A SRL.

PART#	PRODUCT NAME
23-285	30' SRL WITH SNAP HOOK, ALUMINUM HOUSING
23-286	30' SRL WITH SNAP HOOK, THERMOPLASTIC HOUSING
23-287	50' SRL WITH SNAP HOOK
23-288	65' SRL WITH SNAP HOOK

LEADING EDGE SRL

The Leading Edge SRL is specifically designed for use around edges where falls may occur. It is built with additional absorbers and can be used for horizontal applications where an overhead attachment point may not be available. For work in fall hazard zones, a Leading Edge SRL is necessary to ensure maximum fall protection.



- Rugged aluminum housing, non-corrosive stainless steel components and galvanized steel cable wire.
- Quick-action braking system.
- Swivel top and swivel hook.
- Side lifeline exit with rubber (TPV) ergonomic handle.
- Internal energy absorption system.
- Multiple hook configurations available: self-locking snap hook on lifeline.
- Designed to meet and exceed the requirements of ANSI Z359.14-2014 CLASS A SRL

PART #	PRODUCT NAME
23-291	30' SRL-LE WITH SNAP HOOK
23-292	33' SRL-LE WITH SNAP HOOK
23-293	50' SRL-LE WITH SNAP HOOK
23-294	65' SRL-LE WITH SNAP HOOK

TWIN CABLE LEADING EDGE SRL

The Twin Cable SRL provides two levels of fall protection by having two separate anchor points to absorb shock in the event of a fall. This make it the ideal choice when ascending, descending, or moving laterally, as it allows for one hook to always be secured.



23-290

FEATURES

- Compact and lightweight design incorporates thermoplastic housing, non-corrosive stainless steel components and galvanized steel wire cable.
- Quick-action braking system.
- Swivel top.
- Side lifeline exit with rubber (TPV) ergonomic handle.
- Light connector for twin-leg SRL direct attachment to harness.
- Backpack style energy absorber.
- SRL-LE increases safety: available for sharp and smooth edges.
- Designed to meet and exceed the requirements of ANSI Z359.14-2014 CLASS A SRL

SRL CONNECTORS

Connector components designed to attach the Twin Cable Leading Edge SRL to a harness dorsal ring. They can also be used to connect two individual SRLs to a harness dorsal ring for redundancy and continuous tie-off.





SCREW TYPE CONNECTOR





23-521

23-520

FALL PROTECTION KITS

This is a complete all-in-one kit for fall protection. It includes a full body harness, rope grab with a 2' shock absorbing lanyard, anchor and a vertical lifeline, all housed in a 5 gallon storage pail. Ideal for nearly any roofing job.



23-450

FEATURES

- 23-101 Warrior 5 Adjustment Point Harness—Class A, CSA Z259.10 certified, OSHA and ANSI compliant.
- 23-202 Rope Grab with Shock Absorbing Lanyard—for use with 5/8" rope, 2' external shock pack, CSA Z259.11 certified and OSHA/ANSI compliant.
- 23-413 Reusable Roof Anchor—dual plate variable pitch design, stainless steel construction, 310 lb single-person capacity.
- Single Hook Lifeline—3-strand rope, 3,600 lb snap hook gate strength, CSA Z259.2.5 certified, OSHA and ANSI compliant.
- 5 gallon storage pail.

PART#	PRODUCT NAME	23-440 25' KIT	23-450 50' KIT
23-101	WARRIOR 5 ADJUSTMENT POINT HARNESS	✓	✓
23-202	ROPE GRAB WITH SHOCK ABSORBING LANYARD	✓	✓
23-413	REUSABLE ROOF ANCHOR	✓	✓
23-254	25' SINGLE HOOK LIFELINE	✓	
23-263	50' SINGLE HOOK LIFELINE		✓

SAFETY GLASSES

Economical and stylish standard safety glasses for construction applications.



23-500

FEATURES

- Sport temples with soft temple tip pads for a secure and comfortable fit.
- Secure wrap-around design.
- Polycarbonate, distortion-free, hardcoat lenses.
- Ideal for protection against abrasion, airborne particles, biohazards and impact.
- Complies with all ANSI, OSHA and CSA standards.

PART#	PRODUCT NAME
23-500	CLEAR LENS SAFETY GLASSES
23-502	BLUE MIRROR LENS SAFETY GLASSES
23-504	SILVER MIRROR LENS SAFETY GLASSES

CSA TYPE 2 HARD HAT

Provides crown and lateral impact & penetration force transmission protection, dielectric protection up to 2kV.



23-561

- Shell molded from 1% high density polyethylene with special UV radiation protection additive.
- Low profile design. Flame retardant foam liner.
- PPE slots to accommodate protective equipment.
- Multi-positional suspension adjustment.
- Low riding nape strap and pad.
- Heat exhaust and rain channels.

PART#	PRODUCT NAME
23-561	CSA TYPE 2 HARD HAT WHITE
23-562	CSA TYPE 2 HARD HAT BLUE
23-563	CSA TYPE 2 HARD HAT YELLOW
23-564	CSA TYPE 2 HARD HAT RED



Roofing is a tough gig. Primegrip knee pads are renowned and well-respected in the roofing community for providing comfort and relief to thousands of roofers. Our pads are designed to take a beating in any environment, so that your knees don't have to.



Scan to see our knee pads!

ROOFER'S KNEE PADS

Constructed from a special sponge rubber blend, they are perfect for use on cement, masonry, asphalt and other roof surfaces.



43-112

- Specially formulated natural sponge rubber.
- Reinforced by "power mesh" for extra durability.
- ¾" wide leather straps.
- Adjustable buckles.







KNEE SAVER KNEE PADS

The Knee Saver is constructed with a specially formulated foam rubber for comfort and have our popular Knee Pit Saver strap sleeves built-in.





43-114

FEATURES

- Extra softness and comfort.
- Superb traction on any surface.
- Ergonomic concave design holds knee pads from sliding or riding up while offering true shin and thigh comfort while standing.
- Built-in Knee Pit Savers prevent pressure and chafing from the leather straps.

BULT BATTLE STRONG:









Lightweight and durable foam rubber knee pads.



43-115

QUICK GRIP KNEE PADS

Grooved knee pads with firm grip. Quick connect buckles allow for quick adjustment and removal.



43-118

FEATURES

- Comfortable elastic strap.
- One size fits all.

FEATURES

- Soft premium quality rubber for extra comfort and long life.
- Ergonomic design for better grip.
- Comfortable padding.
- Quick connect buckles for easy adjustment.

LEATHER KNEE PADS

For veterans of the trades who prefer to go with leather when it comes to their knee pads.



43-123

POLYURETHANE KNEE PADS

Heavy-duty knee pads.



43-132


FEATURES

- Non-marring leather is excellent for flooring. Riveted for extra strength.
- Designed for comfort, protection and support.
- ½" thick water-repellent felt lining.
- Adjustable leather straps with steel buckles.

- Extra thick polyurethane material.
- 2¾" leather straps per pad and metal buckles.

KNEE PIT SAVER

Soft rubber sleeve that slips onto knee pad straps to prevent the straps from chafing the knee pit.



43-109



FEATURES

- Soft, flexible rubber for comfort.
- Easy to clean.
- Slip-resistant. Durable and long-lasting.
- 2 pairs per pack—10¼" and 8¾".

WORKS WITH MOST LEATHER STRAP KNEE PADS



ROOFER'S KNEE PAD STRAP

Replacement strap for Roofer's Knee Pads (43-112).



KNEE PAD INSERTS—PAIR

Pair of foam knee pad inserts for additional comfort.



43-148

FEATURES

- 34" width.
- Adjustable buckles.

FEATURES

43-111

- Compatible with all Primegrip knee pads.
- Stick-on surface.
- Good for up to 5 uses.



Cuts. Scrapes. Bruises. Every jobsite comes with its set of hazards. No matter how seasoned you are, you can never underestimate the value of a good pair of work gloves. We offer gloves for all applications—whether lifting, painting, machining or doing heavy industrial work.

COTTON MASONRY GLOVES

General purpose gloves. 12-pack.



23-914

SPOTTED GRIP GLOVES—BLACK

General purpose gloves with PVC grip. 12-pack.



23-920

FEATURES

- 60% Cotton, 40% Polyester knit.
- Green cuff.

FEATURES

- 10G cotton polyester string knit.
- PVC spotted grip.

SPOTTED GRIP GLOVES—WHITE

General purpose gloves with PVC grip. 12-pack.



FEATURES

- 10G cotton polyester string knit.
- PVC spotted grip.
- Green cuff.

PART#	PRODUCT NAME
23-922	М
23-923	L
23-924	XL

23-923



Primegrip professional series work gloves utilize a special blend of polyester and cotton to make the gloves comfortable and durable, allowing you to keep them on for hours at a time. Our selection of textures and coatings, ranging from latex to nitrile, to polyurethane, can cover a wide range of industries and working environments. Our sizing options guarantee that no hand will go exposed.

Gloves that are designed to handle anything nature can throw at you. So, next time you are looking for paw protection, keep an eye out for the Bear Claw.

EASY COLOUR COORDINATED SIZE IDENTIFICATION

Glove sizes can be quickly identified by the colour of the cuff.











CHOOSE THE APPROPRIATE COATING FOR THE JOB

	POLYURETHANE	LATEX	NITRILE
ABRASION RESISTANCE	•	•	•
ELASTICITY / DEXTERITY	•	•	
EXTREME HEAT RESISTANCE			•
NON-ALLERGENIC	•		
EXTREME COLD RESISTANCE			•
OIL / GREASE RESISTANCE	•		•

BOBCAT NITRILE COATED GLOVES, 12 PACK

WILDCAT CRINKLE LATEX COATED GLOVES





23-970

23-949

FEATURES

- 13G polyester shell, smooth nitrile coating.
- Offers better grip on wet and oily surfaces.
- Extremely resistant to punctures and tears.
- Withstands wider range of chemicals.
- Extreme temperature resistance.

AVAILABLE IN:



FEATURES

- 10G polyester/cotton shell, crinkled latex coating.
- High elasticity for dexterity and comfort.
- Superior grip in dry applications.
- Crinkle finish provides added abrasion resistance.

AVAILABLE IN:



PANTHER LATEX FOAM COATED GLOVES



23-971

CHEETAH DOUBLE LATEX COATED GLOVES



23-972

FEATURES

- 13G polyester/cotton shell, latex foam coating.
- High elasticity for dexterity and comfort.
- Superior grip in dry applications.

AVAILABLE IN:



FEATURES

- 13G polyester shell, double-dipped sandy latex coating.
- High elasticity for dexterity and comfort.
- Superior grip in dry applications.
- Double-dipped latex provides better durability and abrasion resistance.

AVAILABLE IN:

S M L XL XXI

JAGUAR SANDY NITRILE COATED GLOVES

ULTRALIGHT PU COATED GLOVES





23-974

FEATURES

- 13G polyester shell, sandy nitrile coating.
- Offers better grip on wet and oily surfaces.
- Extremely resistant to punctures and tears.
- Withstands wider range of chemicals.
- Extreme temperature resistance.

AVAILABLE IN:

XLXXL

FEATURES

23-973

- 13G polyester shell, polyurethane coating.
- Cost-effective option for light duty applications.
- Non-allergenic, offers excellent grip without being sticky.
- Provides finger dexterity and puncture resistance without added bulk.
- Excellent resistance to oil-based chemicals and solvents.

AVAILABLE IN:

XXL Μ

CONDOR CUT-RESISTANT GLOVES









23-975

RAPTOR CUT-RESISTANT GLOVES









23-976

FEATURES

- 13G high performance polyethylene shell, sandy nitrile coating.
- ANSI Level 4 cut resistance.
- Offers better grip on wet and oily surfaces.
- Withstands wider range of chemicals.
- Extreme temperature resistance.

AVAILABLE IN:









XXL

FEATURES

- 13G high performance polyethylene shell, crinkled latex coating.
- ANSI Level 4 cut resistance.
- High elasticity for dexterity and comfort.
- Superior grip in dry applications.
- Crinkle finish provides added abrasion resistance.

AVAILABLE IN:









OSPREY CUT-RESISTANT GLOVES









23-977

FREEZEMATE 7G DOUBLE SHELL GLOVES





23-978

FEATURES

- 13G high performance polyethylene shell, polyurethane coating.
- ANSI Level 4 cut resistance.
- Non-allergenic, offers excellent grip without being sticky.
- Provides finger dexterity and puncture resistance without added bulk.
- Excellent resistance to oil-based chemicals and solvents.

FEATURES

- Super warm 7G polyester/cotton double shell, latex foam coating.
- High elasticity for dexterity and comfort.
- Superior grip in dry applications.

AVAILABLE IN:









AVAILABLE IN:







XXL

WHITE WOLF DRIVER GLOVES

Full grain sheepskin leather driver work gloves. Reinforced stitching in high stress areas and slip-on style cuffs for quick donning and removal.





23-907

ARCTIC FOX DRIVER GLOVES

Full grain sheepskin leather driver work gloves lined with soft cotton fleece. Reinforced stitching in high stress areas and slip-on style cuffs for quick donning and removal.





23-908

FEATURES

- Premium full grain sheepskin leather.
- Slip-on cuff with shirred elastic wrist.
- Reinforced stitching for durability.
- Ideal for driving, hand tools and maintenance.

FEATURES

- Premium full grain sheepskin leather.
- Slip-on cuff with shirred elastic wrist.
- Reinforced stitching for durability.
- Soft cotton fleece lining for extra warmth.
- Ideal for driving, hand tools and maintenance.

AVAILABLE IN:











S



AVAILABLE IN:





GROUNDHOG LEATHER GLOVES

Full grain goat leather work gloves provide full flexibility and range of motion.



23-904

FEATURES

- Leather for abrasion protection
- Denim for comfort and durability
- Ergonomic design reduces hand fatigue
- Applications: automotive, construction, assembly, general material handling, and agriculture

AVAILABLE IN:



HIGH-PERFORMANCE GLOVES

Padded work gloves for use in HVAC, electrical, plumbing, landscaping and with hand or power tools.





23-930

FEATURES

- Comfortable two-way stretch spandex top and thumb increases breathability and fit.
- Easy entry cuff, Reinforced synthetic fingers and nylon outer shell provides extra protection.
- Leather palms provide extra padding and protection.

PART#	PRODUCT NAME
23-929	М
23-930	L
23-928	XL

WHITE LIZARD LEATHER GLOVES

Soft and comfortable goat leather gloves with double-padded palms and TPR impact protection.



23-912

FEATURES

- Lightweight and soft goat leather.
- TPR layer on the back provides impact protection.
- High abrasion resistance and tensile strength.
- Slip-on elastic sewn wrist keeps out dirt and debris.
- Applications: construction, oilfields, mining, drilling, rigging, and railroad work.

AVAILABLE IN:





TPR IMPACT PROTECTION

ELASTIC SEWN WRIST



BADGER INDUSTRIAL GLOVES

Full finger gloves that feature a spandex liner and padded polyurethane palm with soft grip palm pad, and provide full flexibility and range of motion.





HOOK AND LOOP STRAP

23-931

FEATURES

- Padded Polyurethane palm.
- Spandex liner provides an excellent fit and breathability.
- Ergonomic design reduces hand fatigue.
- Elastic cuff with hook and loop strap fits snugly around wrist to keep out dirt and debris.
- Applications: automotive, construction, assembly, general material handling, and agriculture.

AVAILABLE IN:







MEERKAT INDUSTRIAL GLOVES

Extremely soft and comfortable goat grain leather industrial work gloves.



23-932

FEATURES

- Full grain goat leather with mesh for breathability.
- High visibility lime green colour.
- Internal padded palm, neoprene knuckle protection.
- Neoprene cuff with hook and loop strap.
- Applications: construction, oilfields, mining, drilling, rigging, and railroad work.

AVAILABLE IN:









HOOK AND LOOP STRAP NEOPRENE KNUCKLE PROTECTION



ARMADILLO INDUSTRIAL GLOVES

Rugged industrial gloves with ultimate dexterity and impact protection.



23-937

FEATURES

- Form-fitting spandex with goat leather palm.
- TPR padding on the back of hand for impact protection.
- Textured padding on finger tips (thumb, index, and middle finger).
- Neoprene cuff with hook and loop strap.
- Applications: automotive, construction, oilfields, mining, drilling, rigging, and railroad work.

AVAILABLE IN:









TPR IMPACT PROTECTION

HOOK AND LOOP STRAP



RHINO INDUSTRIAL GLOVES

Industrial gloves with luxurious goat leather, TPR padding for unrivaled paw protection.



23-938

TPR IMPACT PROTECTION

FEATURES

- Premium genuine goat leather.
- Double padded palm with non-slip coating.
- Non-slip trim on insides of fingers.
- TPR padding on the back of hand for impact protection.
- Neoprene cuff with hook and loop strap.
- Applications: construction, oilfields, mining, drilling, rigging, and railroad work.

AVAILABLE IN:







HOOK AND LOOP STRAP



SPLIT LEATHER WORK GLOVES

Premium side split leather gloves. 12-pack.



23-651

FEATURES

- Offer top-notch warmth, durability and dexterity.
- Soft lined palm to keep hands comfortable.

SUPPORT BELTS

General purpose lightweight support belts for all trades, available with single or double D-rings.



23-546

- Fits all harnesses.
- Plated grommets for improved corrosion resistance.
- Polyester webbing.

PART#	PRODUCT NAME	BELT	PAD
23-541	1 RING SMALL	51"×2"	27.5"×6.25"
23-542	1 RING MEDIUM	53"×2"	30"×6.25"
23-543	1 RING LARGE	56"×2"	31"×6.25"
23-544	1 RING X-LARGE	61"×2"	33.5"×6.25"
23-545	2 RING SMALL	51"×2"	27.5"×6.25"
23-546	2 RING MEDIUM	53"×2"	30"×6.25"
23-547	2 RING LARGE	56"×2"	31"×6.25"
23-548	2 RING X-LARGE	61"×2"	33.5"×6.25"

PADDED SUPPORT BELTS

Lightweight for worker comfort.



23-533

BELT-POUCH COMBO

Padded double ring work positioning support belt system with 2" utility belt and 3 nylon pouches.



23-532

FEATURES

- Padded lumbar support made from closed cell foam.
- Plated grommets for improved corrosion resistance.
- Polyester webbing.

PART#	PRODUCT NAME	BELT	PAD
23-533	SMALL	51"×2"	27.5"×6.25"
23-534	MEDIUM	53"×2"	30"×6.25"
23-535	LARGE	56"×2"	31"×6.25"
23-536	X-LARGE	61"×2"	33.5"×6.25"
23-537	XX-LARGE	64"×2"	35"×6.25"

FEATURES

- Lightweight for worker comfort.
- Closed cell foam padded lumbar support.
- Plated grommets for improved corrosion resistance.
- Polyester webbing.
- Includes a 2-pocket pouch, 3-pocket pouch and hammer holder.

RUBBER TIE DOWNS

EPDM rubber tie downs, ideal for securing heavy loads.



25-113

- Heavy-duty, premium EPDM rubber stretches up to 1½ times its original length.
- Resists cracking, abrasion and other damage caused by steam, sunlight, oxidation, heat and cold.
- 2.5"×1.5" steel hooks are pre-certified for strength.

PART#	PRODUCT NAME	MAX. LENGTH
25-113	15" RUBBER TIE DOWN	23.00"
25-114	21" RUBBER TIE DOWN	32.00"
25-116	31" RUBBER TIE DOWN	47.00"
25-117	41" RUBBER TIE DOWN	62.00"

RATCHET TIE DOWNS

Heavy duty multi-purpose ratchet tie downs that do the tightening for you.



25-345

FEATURES

- Minimum breaking strength 10,000 lb.
- Use for loads up to 3,333 lb.
- Superb holding power, precise tension adjustment.
- Push-button quick release. Vinyl-coated steel hooks.

PART#	PRODUCT NAME
25-345	1×15" RATCHET—1,000 LB
25-346	1×15" RATCHET—1,500 LB
25-353	2"×27' CAMO RATCHET
25-354	2"×27' RATCHET—BULK PACK
25-355	2"×27' RATCHET

4-PACK TIE DOWNS

Ratchet and cambuckle tie downs available in retail-friendly 4 piece value packs.



25-358

- Minimum breaking strength 1,500 lb.
- Use for loads up to 500 lb.
- Superb holding power, precise tension adjustment.
- Available in safety yellow or camo patterns.

PART#	PRODUCT NAME
25-347	1"×15' CAMO RATCHET—4 PACK
25-348	1"×15' CAMO—2 RATCHET & 2 CAMBUCKLE
25-358	1"×15' RATCHET—4 PACK



For professionals working at heights, dropped objects result in hundreds of deaths, thousands of injuries and millions of dollars in accident costs, equipment damage and lost productivity. The ANSI/ISEA 121-2018 American National Standard for Dropped Object Prevention Solutions is a landmark step towards active drop prevention and the reduction of losses stemming from accidents on jobsites.

Due to our deep-rooted relationship with the roofing and construction industries, here at Primegrip, we champion any cause that makes working at heights safer for our customers. With that goal in mind, we are proud to present our brand new line of tool drop prevention connectors and lanyards.

DON'T LOSE YOUR \$#!+ PUT A LEASH ON IT



We offer three different types of tethering connections that can be retrofitted to various tools and equipment widely in use today:



CARABINER, (23-733, 23-734, 23-735, 23-738, 23-739)

Offers the simplest and quickest attachment and detachment option. We employ heavy duty aluminum alloy or stainless steel in our carabiners with double locking gates and locking nuts for ultimate protection against mishaps. Can only be used with tools that have tethering slots for carabiner attachment. **WARNING:** Tool Tie carabiners can not and must not be used for worker fall protection, climbing or abseiling.

LOOP OR STRAP, (23-730, 23-731, 23-732, 23-736, 23-737, 23-742)

More versatile than carabiner connections, they can be pulled through holes on the tool body and cinched tight, or alternatively, they can be cinched around the shafts of tools such as hammers and wrenches. In the latter case, the connection must be reinforced with our Tool Tie Tape to ensure that the loop does not slip off the shaft. **WARNING:** Failure to tape a loop or strap type connection to a tool handle or shaft may result in the failure of the drop prevention system.





TOOL LINKS, (23-740, 23-741)

Short straps that can be taped onto multiple tools with no tethering slots, so everything on your tool belt is ready for work at heights. The straps feature a stainless steel D-ring for attachment to lanyard carabiners and each pack comes with three sizes of Tool Links for differently sized tools. Can not be used without Tool Tie Tape or without a carabiner lanyard for connecting to an anchor point.

ECONOMY TOOL LANYARD



FEATURES

- Stretch cord surrounded by tubular nylon webbing.
- Lock stitching at both ends for extra security.
- Aluminum carabiner & loop with adjustable barrel lock for attachments.
- Complies with work at heights laws.
- Maximum safe working capacity: 10 lb.
- Carabiner dimensions: 3"×1.5".
- Maximum extended length: 30".

10 LB CARABINER-STRAP TOOL LANYARD—40"



- Nylon webbing gives better protection for heavier tools.
- Designed to be attached to structure anchor point.
- Single piece construction.
- Aluminum alloy swivel carabiner, double locking gate.
- Heavy-gauge nylon stitching for strength and durability.
- Certified to 10 lb (4.5 kg) max. capacity.
- Complies with ANSI/ISEA 121-2018.

10 LB CARABINER-LOOP TOOL LANYARD—70"



FEATURES

- Shock absorbing cord reduces forces during drop.
- Polyester elastic webbing extends 25" 70".
- Low profile lightweight design.
- Aluminum alloy swivel carabiner, double locking gate.
- Single piece construction.
- Certified to 10 lb (4.5 kg) max. capacity.
- Complies with ANSI/ISEA 121-2018.

20 LB CARABINER-LOOP TOOL LANYARD-70"



FEATURES

- Shock absorbing cord reduces forces during drop.
- Polyester elastic webbing extends 18" 70".
- Low profile lightweight design.
- Aluminum alloy carabiner with double locking gate.
- Single piece construction.
- Certified to 20 lb (9 kg) max. capacity.
- Complies with ANSI/ISEA 121-2018.

20 LB DUAL CARABINER TOOL LANYARD—70"



FEATURES

- Shock absorbing cord reduces forces during drop.
- Durable polyester elastic webbing extends 22" 70".
- Low profile design reduces snag hazards and weight.
- Aluminum alloy carabiners with double locking gate.
- Single piece construction.
- Certified to 20 lb (9 kg) max. capacity.
- Complies with ANSI/ISEA 121-2018.

30 LB DUAL CARABINER TOOL LANYARD-40"



FEATURES

- Nylon webbing gives better protection for heavier tools.
- Designed to be attached to structure anchor point.
- Single piece construction.
- Aluminum alloy carabiners with double locking gate.
- Heavy-gauge nylon stitching for strength and durability.
- Certified to 30 lb (13.6 kg) max. capacity.
- Complies with ANSI/ISEA 121-2018.


20 LB TRIPLE CARABINER TWIN LEG TOOL LANYARD—70"



FEATURES

- Allows two tools to be tethered simultaneously.
- Shock absorbing cord reduces forces during drop.
- Durable polyester elastic webbing extends 20" 70".
- Low profile lightweight design.
- Aluminum alloy carabiners with double locking gate.
- Single piece construction.
- Certified to 20 lb (9 kg) max. capacity.
- Complies with ANSI/ISEA 121-2018.


2 LB TOOL LANYARD WITH 4 TOOL LINKS—70"

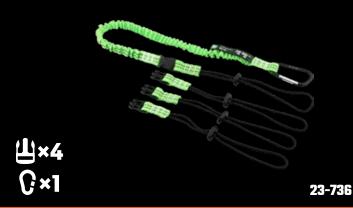

FEATURES

- Allows quick switching between 4 tools.
- Shock absorbing cord reduces forces during drop.
- Durable polyester elastic webbing extends 18" 70".
- Low profile lightweight design.
- Aluminum alloy carabiner.
- Single piece construction.
- Certified to 2 lb (0.9 kg) max. capacity.
- Complies with ANSI/ISEA 121-2018.

5 LB TOOL LANYARD WITH 3 TOOL LINKS—70"

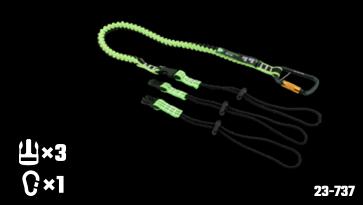

FEATURES

- Allows quick switching between 3 tools.
- Shock absorbing cord reduces forces during drop.
- Durable polyester elastic webbing extends 18" 70".
- Low profile lightweight design.
- Aluminum alloy carabiner with double locking gate.
- Single piece construction.
- Certified to 5 lb (2.2 kg) max. capacity.
- Complies with ANSI/ISEA 121-2018.

6 LB DUAL CARABINER COIL LANYARD—70"



FEATURES

23-738

- Coil type lanyard reduces tool hang length.
- Shock absorbing cord reduces forces during drop.
- Extends 6" 70".
- Stainless steel carabiners with locking nut.
- Certified to 6 lb (2.7 kg) max. capacity.
- Complies with ANSI/ISEA 121-2018.

}×2

101

G×1

2 LB WRIST TOOL LANYARD



FEATURES

- Adjustable wrist lanyard with carabiner limits the distance of a dropped tool and reduces snag hazards.
- Shock absorbing cord reduces forces during drop.
- Adjusts to 4" 10" wrists using hook and loop strap.
- Aluminum alloy swivel carabiner, double locking gate.
- Certified to 2 lb (0.9 kg) max. capacity.
- Complies with ANSI/ISEA 121-2018.

2 LB STRAP-RING TOOL LINKS—3 PACK



FEATURES

- Set of links that attach to tools with no tethering holes.
- Includes a 4", 6" and 8" link.
- Attach to tool using self-adhesive Tool Tie Tape (23-743).
- Tethered with a lanyard carabiner.
- Certified to 2 lb (0.9 kg) max. capacity.
- Complies with ANSI/ISEA 121-2018.

4 LB STRAP-RING TOOL LINKS—3 PACK



FEATURES

- Set of links that attach to tools with no tethering holes.
- Includes a 4", 6" and 8" link.
- Attach to tool using self-adhesive Tool Tie Tape (23-743).
- Tethered with a lanyard carabiner.
- Certified to 4 lb (1.8 kg) max. capacity.
- Complies with ANSI/ISEA 121-2018.

4 LB LOOP-RING TOOL LINK

Đ×١



- Loop-style tool link.
- Tethered with a lanyard carabiner.
- Certified to 4 lb (1.8 kg) max. capacity.
- Complies with ANSI/ISEA 121-2018.

TOOL TIE TAPE



FEATURES

- Self-adhesive tape to attach strap-ring links to tools.
- Used with 23-740 and 23-741.
- Includes a 4", 6" and 8" link.
- 1"×12' (25 mm × 3.7 m).

23-743

CORDLESS DRILL BAG



FEATURES

- Can be used with cordless drills, drivers, impact wrenches and other cordless power tools.
- Compatible with most common cordless power tool brands
- 4 different button positions to adjust for varying battery pack sizes.
- Comes with a robust cinch-style strap with a steel ring for tethering.

23-744

ZEPPSGEAR

PROBLEM

Wise men know that seasons come and go, but work never stops. That is why we are dedicated to making sure that tradespeople have all the gear they need to work safely and comfortably come rain or shine. Or snow and ice. When a brilliant ironworker named Pete Zeppetella came to us and presented a solution to a very common problem, we knew that it was something we had to be a part of.



Tradespeople working at heights are putting their regular work jackets on top of their harnesses to protect themselves from the elements. These jackets either come with zippered slits for the D-ring or are modified by workers themselves. The slit can spread over time, rendering the jacket useless. The jackets are uncomfortable and not designed to be worn with a harness underneath, and **most critically**, highly unsafe in the event of a fall. The harness and the jacket are pulled back, constricting the airway and causing serious consequences.

SOLUTION


Pete's very simple solution to this problem was a patented jacket design with a tear away flap in the back. The flap is held closed by hook and loop strips that open immediately when a fall occurs. This allows the back of the jacket to be pulled back by the harness without the front of the jacket constricting the worker.







Scan the QR code to see the jacket in action!

PRODUCT FEATURES







- Velcro tear-away flap
- 2 Velcro adjustable elastic cuff
- 3 Velcro adjustable waist
- 4 2 inner and 2 outer microphone loops
- 5 2 microphone cable guide zippers

- 6 2 lanyard loops
- 7 4 outer and 2 angled inner pockets
- B 2 radio pockets
- 9 Pencil holders
- 2 hard hat loops

All jackets conform to following safety standards: CSA-Z96 09 Class 2 Level 2, ANSI 107-2010 Class 3 Level 2







HI-VISIBILITY COMFORT FIT

This Hi-Visibility model features 3M Scotchlite reflective material to make sure workers are clearly visible and meet construction regulations on the job site. The comfort fit design incorporates velcro straps at the hem to adjust the jacket to fit slightly wider or narrower hips. The long tail prevents exposure to the elements when reaching up or bending.







SIZING CHART (INCHES)

SIZE	PART #	FRONT	ВАСК	CHEST	WAIST	ARM	SHOULDER
S	23-011	29	31	25	23	28.75	20.5
М	23-012	30	32	26	24	29	21
L	23-013	31	33	27	25	29.25	21.5
XL	23-014	32	34	28	26	29.5	22
XXL	23-015	33	35	29	27	30	22.5
XXXL	23-016	33.5	35.5	29.5	27	30	23

BLACK COMFORT

For trade professionals who don't require Hi-Visibility on site, this model provides all the great features of the Zepps Gear jacket in a cool midnight black. The comfort fit design incorporates velcro straps at the hem to adjust the jacket to fit slightly wider or narrower hips. The long tail prevents exposure to the elements when reaching up or bending.







SIZING CHART (INCHES)

SIZE	PART#	FRONT	ВАСК	CHEST	WAIST	ARM	SHOULDER
S	23-030\$	29	31	25	23	28.75	20.5
М	23-030M	30	32	26	24	29	21
L	23-030L	31	33	27	25	29.25	21.5
XL	23-030XL	32	34	28	26	29.5	22
XXL	23-030XXL	33	35	29	27	30	22.5
XXXL	23-030XXXL	33.5	35.5	29.5	27	30	23

WOMEN'S COMFORT

The construction products industry tends to overlook women's needs when designing their products. We wanted to make sure that we cater to the sisterhood and this model does just that. The specially tapered silhouette was meticulously designed after careful research on different body types and we know the ladies are going to love it. The comfort fit design incorporates velcro straps at the hem to adjust the jacket to fit slightly wider or narrower hips. The long tail prevents exposure to the elements when reaching up or bending.







SIZING CHART (INCHES)

SIZE	PART #	FRONT	BACK	CHEST	WAIST	ARM
S	23-0315	27	27.5	20.5	22.5	26
М	23-031M	27.5	28	22	24	26.5
L	23-031L	28	28.5	23.5	25.5	27

MEN'S BOMBER

For the more style-conscious among us, the men's bomber offers a stylish variation on the Zepps Gear jacket. This model will look equally good on the site and on the street. The base features a classic bomber hem that stretches to fit slightly wider hips and accommodates sitting comfortably.







SIZING CHART (INCHES)

SIZE	PART #	FRONT	ВАСК	CHEST	WAIST	ARM	SHOULDER
S	23-035S	29	29	25	23	28.75	20.5
M	23-035M	30	30	26	24	29	21
L	23-035L	31	31	27	25	29.25	21.5
XL	23-035XL	32	32	28	26	29.5	22
XXL	23-035XXL	33	33	29	27	30	22.5
XXXL	23-035XXXL	33.5	33.5	29.5	27	30	23



Selected tool lines that not only complement the roofer's arsenal, but also have critical applications in general construction. We carry equipment that can help workers in all stages of the construction process, from measuring and layout all the way to painting and finishing.

AIR HOSES KNIVES

CAULKING GUNS BIT HOLDERS TAPES

POUCHES TARPS

HOSE ENDS—2 PACK

Used to create or repair hoses by inserting hose end into a ¼" I.D. air hose and crimping with a ferrule.



30-600

HOSE MENDERS

Used to assemble new hoses or replace old fittings on hoses by securing with a crimped ferrule.



30-640

FEATURES

- Brass hose ends.
- 1/4" NPT thread. Male.

PART#	PRODUCT NAME
30-600	1/4" HOSE END
30-602	%" HOSE END

FEATURES

- Brass hose menders with hose barbs.
- Both ends of mender have the same diameter as indicated.

PART#	PRODUCT NAME
30-640	1/4" HOSE MENDERS
30-642	%" HOSE MENDERS

TRIPLE OUTLET MANIFOLD

With a triple outlet manifold, you can supply 3 air tools from a single inlet without having to disconnect and connect for every tool change.



30-683

M-STYLE COUPLERS

The M-style quick connect couplers and plugs will interchange with all US military specification MIL-C-4109 complying manufacturers.



30-715

FEATURES

- Solid brass and aluminum construction.
- ¼" NPT female inlet.
- Three ¼" NPT female outlets.
- Available with or without couplers.

PART#	PRODUCT NAME
30-683	TRIPLE OUTLET MANIFOLD, 3 MALE ¼" M-STYLE COUPLERS
30-685-4	TRIPLE OUTLET MANIFOLD

FEATURES

- Brass body with brass sleeve. ¼" or ¾" NPT.
- 300 psi maximum inlet pressure.
- 250°F maximum temperature. Air flow 40 SCFM.

PART#	PRODUCT NAME
30-715	M-STYLE COUPLER 1/4" FEMALE
30-716	M-STYLE COUPLER ¼" MALE
30-718	M-STYLE COUPLER %" FEMALE
30-719	M-STYLE COUPLER %" MALE

M-STYLE PLUGS

The M-style quick connect couplers and plugs will interchange with all US military specification MIL-C-4109 complying manufacturers.



A-STYLE COUPLERS

Easy to use A-style push type couplers.



30-727

30-775

FEATURES

- Case-hardened steel body with rust resistant plating.
- 1/4" or 3/8" NPT.
- 300 psi maximum inlet pressure.
- 250°F maximum temperature. Air flow 40 SCFM.

PART#	PRODUCT NAME
30-727	M-STYLE PLUG ¼" MALE
30-728	M-STYLE PLUG ¼" FEMALE
30-732	M-STYLE PLUG ¾" FEMALE
30-733	M-STYLE PLUG ¾" MALE

FEATURES

- Push type. Steel body with rust-resistant plating.
- 1/4" NPT.
- 300 psi maximum inlet pressure.
- 250°F maximum temperature. Air flow 40 SCFM.

PART #	PRODUCT NAME
30-775	A-STYLE COUPLER 1/4" FEMALE
30-776	A-STYLE COUPLER 1/4" MALE

1/4" MALE AMT-STYLE COUPLER

Three-way coupler that accepts A-style, M-style and T-style $\frac{1}{2}$ " plugs.

TEFLON TAPE

Used to wrap around the exposed threads of pipes and air hoses before being screwed in.



30-746



30-800

FEATURES

- 1/4" NPT male.
- Push type with drag guard.
- Heavy duty rust-resistant brass body.

- Comes in resealable plastic container.
- Works with any fitting to provide a high quality seal.
- Impervious to fuel and oil.
- Ensures a secure and tight seal.

LOW TEMPERATURE AIR HOSES

Made from specially formulated compounds of high grade PVC resin. Engineered to be tough and flexible at very low temperatures. The superior physical properties and design of the hose makes it outperform other general purpose PVC and rubber hoses in cold weather air tool applications.





1	
31-116	1/4" NPT×50' LENGTH LOW TEMPERATURE AIR HOSE
31-117	1/4" NPT×100' LENGTH LOW TEMPERATURE AIR HOSE
31-120	%" NPT×25' LENGTH LOW TEMPERATURE AIR HOSE
31-121	%" NPT×50' LENGTH LOW TEMPERATURE AIR HOSE
31-122	3/" NPT×100' I ENGTH I OW TEMPERATURE AIR HOSE

1/4" NPT×25' LENGTH LOW TEMPERATURE AIR HOSE

PRODUCT NAME

31-121

FEATURES

- Excellent low temperature flexibility.
- Extremely easy to handle, even in cold weather.
- Excellent abrasion resistance.

- Resilient material avoids permanent deformation.
- Lightweight.

PART #

31-115

1/4"×50' POLYURETHANE AIR HOSE

Lightweight and flexible air hose ideal for applications where dragging a heavy hose is difficult or not preferred.



31-010

AIR TOOL LUBRICANT

Specifically designed for use in piston type and rotary air tools, as well as in-line air lubrication systems.



31-813

FEATURES

- Easily maneuverable lightweight polyurethane.
- Ideal for non-marring requirements such as flooring.
- Resistant to abrasion, weathering, tearing, impact, oils, grease and fuels.
- Excellent weather flexibility; from -20°C up to 70°C.
- 300 psi maximum working pressure.
- 1/4" NPT connectors with coupler and male plug.

FEATURES

- 1 litre bottle with nozzle.
- Maximizes the life of air tools, lubricators, valves and cylinders.
- Prevents seizure of air tools and pneumatic equipment.

AIR COMPRESSOR OIL

For use in centrifugal compressors where the manufacturer specifies a non-detergent 30 weight oil.



31-823

FEATURES

- 1 litre bottle with nozzle.
- Protects against oxidation, corrosion, foaming and wear of metal parts.
- Protects against sludge and maintains its viscosity in the temperature range of 20°F – 440°F.

9" HEAVY DUTY GUN

Contractor-grade gun designed for 300 ml (10 oz) tubes.



45-120

FEATURES

- Powder-coated revolving Q235 steel barrel.
- Ergonomically designed A00 aluminum handle and trigger.
- 1500 N pushing force, 12:1 thrust ratio.
- Built-in spout cutter and seal punch.

SKELETON-TYPE GUN

9" half-barrel caulking gun. Suitable for light-to-medium applications of glazing, sealing or caulking.




45-121

FEATURES

- Quick-twist pressure release. Hex rod.
- Ladder hook at rear end of push rod.
- Aluminum handle. Built-in seal punch under rail.
- Orange steel frame and black handle.

13" ROTATABLE SKELETON-TYPE GUN

Economical skeleton-type caulking gun designed for easy loading and a professional finish.



45-127

FEATURES

- Powder-coated iron construction with aluminum handle.
- 1200 N pushing force.
- 12:1 thrust ratio.
- Built-in seal punch.
- Built-in lanyard loop for work at heights.

PREMIUM GUN

9" high-performance caulking gun for use with 300ml tubes.



45-146

FEATURES

- Smooth Rod. Quick-twist pressure release.
- High quality corrosion-resistant steel.
- Rotative cartridge frame. Spout cutter and pin.

SAUSAGE-TYPE GUN

15" high-performance caulking gun suitable for use with sausage packs and cartridges.



45-152

FEATURES

- Die-cast body with aluminum tube.
- Plastic plunger and application nozzles included.
- Replacement nozzles available.

PART#	PRODUCT NAME
45-152	SAUSAGE-TYPE CAULKING GUN
45-153	WHITE ECONOMY NOZZLE
45-154	YELLOW HEAVY DUTY NOZZLE

CONTRACTOR GRADE GUN

These heavy duty professional caulking guns are ideal for quick and efficient high quality finishes.



45-162

FEATURES

- 18:1 thrust ratio for use with acrylic, adhesives, asphalt, butyl and cement.
- 9 mm metallurgy driving dog. Zinc alloy handle.
- Quick-twist pressure release. Revolving barrel.
- Includes ladder hook.

PART #	PRODUCT NAME
45-162	9" CONTRACTOR GRADE GUN
45-163	13" CONTRACTOR GRADE GUN

ULTRA SHARP

ULTRA SHARP

General purpose professional grade snap-off utility knives.




FEATURES

- Anti slip ABS body with rubber grip handle.
- Smooth ratchet wheel lock.
- Come with Primegrip ultra sharp carbon steel blade.

PART#	PRODUCT NAME
36-199	18 MM KNIFE IN BULK DISPLAY
36-200	18 MM KNIFE
36-201	18 MM KNIFE WITH RUBBER GRIP
36-202	25 MM KNIFE WITH RUBBER GRIP
36-224	25 MM STRAIGHT GRIP
36-218	18 MM BLADES—10 PACK
36-219	18 MM BLADES—50 PACK
36-220	25 MM BLADES—10 PACK

3X MORE 5X SHARP

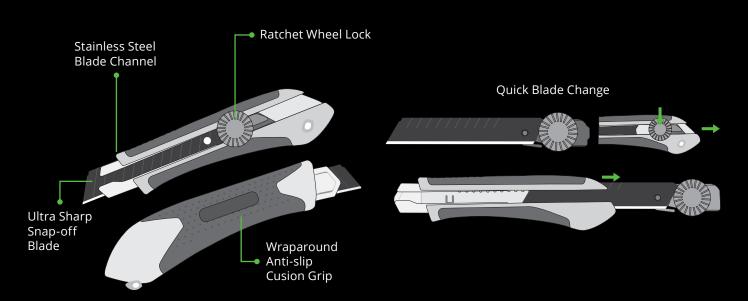

PRIVATE LABEL OPTIONS AVAILABLE

SINGLE OUTLET EXTENSION CORDS

Primegrip hard service extension cords feature a thermoplastic jacket and weather-resistance.



24-225

2' TRIPLE OUTLET EXTENSION CORD

Primegrip hard service extension cords feature a thermoplastic jacket and weather-resistance.



24-200

FEATURES

- Heavy duty oil and water resistant jacket.
- Lit end indicates when power is on.

PART#	LENGTH	AWG GAUGE	CURRENT
24-225	50'	12/3 GAUGE	15A
24-227	100'	12/3 GAUGE	15A

FEATURES

- Triple outlet for flexible usage.
- Heavy duty oil and water resistant jacket.
- Lit end indicates when power is on.

LENGTH	AWG GAUGE	CURRENT
2'	12/3 GAUGE	15A

25'×1" MAGNETIC MEASURING TAPE

Professional grade measuring tape with a blade lock and magnetic hook.



26-138

FEATURES

- Durable rubber grip.
- Thumb lock and 2 temporary blade stop buttons.
- Magnetic blade hook.
- Imperial units with 1/32 inch increment markings.
- Steel belt clip and rubber strap for easy carrying.

25'/7.5M ×1" QUICK RELEASE

Magnetic marking measuring tape with blade lock mechanism and push release button.



26-139

- Imperial and metric units.
- Blade locking mechanism with release button.
- Rubber lanyard for easy carrying.

INFRARED THERMOMETER

Compact, rugged and easy to use, this infrared thermometer reads surface temperatures in less than a second. Just aim and push the button to safely measure surface temperatures of hot, hazardous or hard-to-reach objects without contact.



26-603

FEATURES

- Simple, one-handed operation.
- Laser targeting.
- Backlit LCD display.
- °C and °F toggle.
- Automatic switch off capability.
- Display hold function.

SPECIFICATION	RATING
TEMP RANGE	-50°C — 530°C
ACCURACY	+-2% OR 2°C
RESOLUTION	0.1°C
RESPONSE TIME	< 0.85
EMISSIVITY	0.95 FIXED
DISTANCE TO SPOT RATIO	12:1
SPECTRAL RESPONSE	8—14 MM
STORAGE TEMPERATURE	-30°C — 50°C
OPERATING TEMPERATURE	0°C — 50°C

100' METAL CHALK REEL

100' abrasion-resistant metal chalk reel for marking.



26-614

2 PIECE CHALKLINE SET

Chalkline set with 100' metal chalk reel and 4 oz standard blue marking chalk.



26-617

FEATURES

- Fast retrieve chalk line reel for 6 times faster line rewind than traditional chalk reels.
- Robust steel handle and large ergonomic clutch for increased durability, strength, and torque.
- Strong metal housing withstands wear and tear.

FEATURES

- Fast retrieve chalk line reel for 6 times faster line rewind than traditional chalk reels.
- Robust steel handle and large ergonomic clutch for increased durability, strength, and torque.
- Strong metal housing withstands wear and tear.
- Blue chalk provides high visibility temporary markings for indoor or outdoor use.

PAINT BRUSHES

General purpose paint brushes ideal for small painting projects.



38-182

FEATURES

- Polyester filament bristles.
- For use with all paints.
- Wood handle.

PART#	PRODUCT NAME
38-182	2" BRUSH
38-183	3" BRUSH
38-184	4" BRUSH

PAINT ROLLERS

General purpose paint rollers ideal for standard paint jobs.





38-197

38-198

FEATURES

- For use on walls, doors and lightly textured wood.
- 10mm pile thickness.
- 5-wire cages are threaded for extension poles.

PART#	PRODUCT NAME
38-199	4" PAINT ROLLER REFILL
38-194	4" PAINT ROLLER FRAME
38-197	9" PAINT ROLLER REFILL
38-198	9" PAINT ROLLER FRAME

METAL PAINT TRAY

Steel tray for all types of paint jobs.



38-190

PAINT ROLLER KIT

This 3 piece paint kit is a convenient starter pack for any painting project.



38-196

FEATURES

- Sturdy, ribbed roll-off area for even roller loading.
- Made of heavy gauge rust-resistant steel.
- Durable welded legs to keep the tray level.

- Includes a plastic tray, roller and frame.
- 9" roller with 10mm pile thickness.
- 5-wire frame is threaded for extension poles.
- Tray has ribbed roll-off area and durable legs.



Ask any tradesperson—when they are on the jobsite, they need a dependable pouch that can carry all their gear without bursting at the seams or weighing them down. This is why we focus on making our tool pouches from choice materials for comfort and longevity with carefully designed compartments for optimized storage and a lightweight feel.

10-POCKET LEATHER POUCH

Premium leather tool organizer for professionals.



43-204

FEATURES

120

- 4 tier design for easy separation of tools and fasteners.
- 1 large main pocket, 1 medium-sized nail pocket, 2 belt level inner pockets, 6 small tool pockets.
- 2 metal hammer holders.
- Top-grain oil-tanned leather for heavy duty work loads and extended product life.

13-POCKET POUCH

Premium quality tool organizer with 2" leather belt for professionals.



43-206

FEATURES

- 1 large main pocket, 1 medium-sized nail pocket, 2 belt level inner pockets, 6 small tool pockets.
- 2 metal hammer holders.
- High quality leather for heavy duty work loads and extended product life.

PART#	PRODUCT NAME
43-206	13-POCKET LEATHER POUCH WITH 2" LEATHER BELT
43-226	13-POCKET SUEDE POUCH WITH 2" LEATHER BELT

3-POCKET LEATHER TOOL HOLDER



43-307



43-320

FEATURES

- Ideal for utility knives, pliers, screwdrivers, pencils, etc.
- Features 3 leather pockets.
- Includes two clips to attach keys and lanyards.
- Reinforced stitching and rust-resistant rivets for strength and durability.
- Belt loop fits 2" belts.

PART#	PRODUCT NAME
43-307	3-POCKET VEGETABLE-TANNED LEATHER TOOL HOLDER
43-320	3-POCKET OIL-TANNED LEATHER TOOL HOLDER

OIL-TANNED LEATHER TOOL HOLDER WITH TAPE BAR



43-321

VEGETABLE-TANNED LEATHER WRENCH HOLDER



43-309

FEATURES

- 3-pocket tool holder ideal for pliers, screwdrivers, pencils, wrenches etc.
- Features 3 slim leather pockets and electrical tape bar.
- Includes a clip to attach keys and lanyards.
- Reinforced stitching and rust-resistant rivets for strength and durability.
- Belt loop fits 2" belts.

FEATURES

- Heavy-duty vegetable-tanned leather construction.
- 2 tool slots
- Tunnel-loop belt connection is riveted for durability.
- Accommodates up to 2 erection wrenches or adjustable construction wrenches.

3-LOOP LEATHER TOOL HOLDER



43-305



43-318

FEATURES

- Ideal for utility knives, screwdrivers, pencils.
- Vegetable-tanned leather triple tool holder.
- Features 3 leather pockets.
- Reinforced stitching and rust-resistant rivets for strength and durability.
- Belt loop fits 2" belts.

PART#	PRODUCT NAME
43-305	3-LOOP VEGETABLE-TANNED LEATHER TOOL HOLDER
43-318	3-LOOP OIL-TANNED LEATHER TOOL HOLDER

4-LOOP LEATHER TOOL HOLDER



43-306



43-319

FEATURES

- Ideal for utility knives, scissors, pencils, seam rollers, etc.
- Vegetable-tanned leather tool holder.
- Features 4 leather pockets.
- Reinforced stitching and rust-resistant rivets for strength and durability.
- Belt loop fits 2" belts.

PART#	PRODUCT NAME
43-306	4-LOOP VEGETABLE-TANNED LEATHER TOOL HOLDER
43-319	4-LOOP OIL-TANNED LEATHER TOOL HOLDER

HAMMER & KNIFE HOLDER

Top grain leather holder for hammer and knife.



43-216

LEATHER HAMMER HOLDER

Oil-tanned fixed leather hammer holder.



43-300

FEATURES

- Rugged top grain leather.
- Lock stitching reinforced with rivets.
- Roll over type belt loop.
- Steel cradle hammer holder.

FEATURES

- Manufactured from top-grain, heavy duty leather.
- Fixed steel loop.
- Suitable for belts up to 2" wide.

LEATHER SCISSOR HOLDER

Top grain leather scissor holder.



43-314

KNIFE SHEATHE

Top grain leather knife sheathe.



43-313

FEATURES

- 10½" leather sheath.
- Hangs from belt.
- Includes pocket for roofing shears.
- Includes roller loop for seam roller.

FEATURES

- Constructed of saddle leather designed to fit most knives and pliers.
- Reinforced stress points.
- Stainless rust-resistant tape clip.
- Fits up to 2" wide belts.

LEATHER KNIFE HOLDER



43-323



VEGETABLE-TANNED LEATHER KNIFE HOLDER

43-327

FEATURES

- Slim premium leather knife holder.
- and
- Belt

d durability.	43-327	OIL-TANNED LEATHER KNIFE HOLDER
lt loop fits 2" belts.		

43-323

LEATHER TAPE HOLDER



43-325



43-328

FEATURES

- Slim premium leather holder for measuring tapes.
- Reinforced stitching and rust-resistant rivets for strength and durability.
- Belt loop fits 2" belts.

PART #	PRODUCT NAME
43-325	VEGETABLE-TANNED LEATHER TAPE HOLDER
43-328	OIL-TANNED LEATHER TAPE HOLDER

124

2" WAIST BELT

Top grain leather waist belt.



43-393

CANVAS BOLT BAG



43-815

FEATURES

- Manufactured from top-grain leather.
- Heavy roller buckle.

FEATURES

- High quality canvas bag with reinforced bottom for carrying bolts and small tools.
- Bull-pin loop on each side.
- Double-stitched and riveted for added strength.
- Belt loop.

CANVAS BOLT BUCKET



43-819

FEATURES

- High quality canvas bucket for carrying bolts and tools.
- High strength canvas capable of carrying up to 100 lb (45 kg).
- Plastic bottom keeps the bag stable and upright, and adds durability.
- Reinforced rope strap replaces weaker webbed fabric straps used by other manufacturers.
- Double-stitched and riveted for added strength.

EXTENSION BIT HOLDERS

Extra-long extended driver for hard to reach areas.



18-603

FEATURES

- Outer sleeve allows for holding and directing the tool without any discomfort.
- Magnetic, low profile quick release bit holder.
- Auto locking drive.

PART #	PRODUCT NAME
18-600	21/4" QUICK CONNECT EXTENSION BIT HOLDER
18-601	3" QUICK CONNECT EXTENSION BIT HOLDER
18-602	6" QUICK CONNECT EXTENSION BIT HOLDER
18-603	12" QUICK CONNECT EXTENSION BIT HOLDER
18-604	18" QUICK CONNECT EXTENSION BIT HOLDER
18-605	24" QUICK CONNECT EXTENSION BIT HOLDER

6-IN-1 STUBBY SCREWDRIVER

Ideal screwdriver for the kitchen drawer and superb for close-quarters jobs.



18-916

FEATURES

- Slimmer handle than standard drivers.
- High-strength magnet holds bit and screw securely.
- Bits are ideal for use in drills and power drivers (powerrated ¼" hex, 1.3" long).
- Stores 5 bits in handle plus 1 in shaft.

SHEATHING TAPE

Made of UV resistant polypropylene film and coated with high shear, high tack solvent based acrylic adhesive.



28-416

FEATURES

- 4.1 mil thickness.
- Ideal for sealing joints and seams of insulation.
- High tack adhesive provides aggressive contact.
- Strong and durable holding power.
- Excellent resistance to moisture, UV and weathering.
- Prevents air infiltration.

PART#	PRODUCT NAME
28-416	SHEATHING TAPE RED—60MM×55M
28-417	SHEATHING TAPE WHITE—60MM×55M

VAPOR BARRIER SHEATHING TAPE

Made of UV resistant polypropylene film and coated with a specially formulated solvent-based acrylic adhesive.



28-415

- 60mm×55m, 3 mil thickness.
- Ideal for sealing of joints and seams of polyethylene vapor barriers.
- High tack adhesive provides aggressive contact.
- Outstanding adhesion on polyethylene.
- Strong and durable holding power.
- Excellent resistance to moisture, mold and UV.
- Prevents air infiltration.

ROOF REPAIR TAPE

A highly effective, long-term solution for repairing leaks on virtually all roofing materials including TPO, EPDM, and metal. Perfect for reinforcing non-leaking seams and for additional security around curbs, vents, chimneys, AC systems, antennae, or any roof-penetrating devices.





FEATURES

- VOC-free and stable from -70°F to 200°F (-56°C to 93°C).
- Easy to apply to clean, dry surfaces.
- Flexible and readily conforms to shapes, suited for gutter repairs, piping and other curved equipment.
- UV resistant for assured longevity.
- Extra sealing strength stops water or air penetration in cement, plywood, OSB, and metal.
- Excellent for stopping leaks on mobile homes, RVs, vans, garden sheds, tarpaulins and some unpressurized piping. Extremely effective in below grade concrete wall penetrations for water, sewer and electrical service.

PART#	PRODUCT NAME
28-300	4"×25' ROOF REPAIR TAPE—BLACK
28-301	6"×25' ROOF REPAIR TAPE—BLACK
28-302	12"×25' ROOF REPAIR TAPE—BLACK
28-303	4"×25' ROOF REPAIR TAPE—WHITE
28-304	6"×25' ROOF REPAIR TAPE—WHITE
28-305	12"×25' ROOF REPAIR TAPE—WHITE

BLUE TARPS

All-purpose blue tarps.



38-1520

- Rust-resistant aluminum grommets.
- Rope-reinforced hem with strengthened corner bars.
- 8×8 netting.
- Waterproof. Built-in UV protection.
- Flexible and lightweight for easy storage.

PART#	PRODUCT NAME
38-0608	6'×8' BLUE TARP
38-0810	8'×10' BLUE TARP
38-1012	10'×12' BLUE TARP
38-1015	10'×15' BLUE TARP
38-1216	12'×16' BLUE TARP
38-1520	15'×20' BLUE TARP
38-1824	18'×24' BLUE TARP
38-2030	20'×30' BLUE TARP
38-3050	30'×50' BLUE TARP

PRODUCT INDEX

02-234 47	22-880 61	23-426 69	25-117 96	36-276 28	43-819 125	73-255 17
02-235 47	22-881 61	23-440 81	25-345 97	36-279 10	45-120 114	73-320 66
02-332 47	23-011 106	23-450 81	25-346 97	36-280 10	45-121 114	73-321 5
02-333 47	23-012 106	23-471 49	25-347 97	36-290 11	45-127 115	73-322 5
02-334 47	23-013 106	23-500 82	25-348 97	36-29111	45-146 115	73-325 5
02-335 47	23-014 106	23-502 82	25-353 97	36-292 9	45-152 115	73-326 5
03-520 51	23-015 106	23-504 82	25-354 97	36-301 27	45-153 115	73-334 5
03-521 51	23-016 106	23-51377	25-355 97	36-302 27	45-154 115	73-335 6
03-525 53	23-030L 107	23-520 80	25-358 97	36-303 27	45-162 115	73-338 6
03-526 53	23-030M 107	23-521 80	26-138 117	36-304 27	45-163 115	73-340 13
03-527 53	23-030S 107	23-532 96	26-139 117	36-305 27	45-165 61	73-341 13
03-528 54	23-030XL 107	23-533 96	26-603 118	36-306 27	45-522 8	73-343 6
03-529 54	23-030XXL107	23-534 96	26-614 118	36-317 57	45-523 8	73-400 6 73-405 7
03-530 54 03-531 54	23-030XXXL .107 23-031L108	23-535 96 23-536 96	26-617 118 28-300 127	36-318 57 36-319 57	45-526 8 46-003 29	73-501 7
03-532 51	23-031L 108	23-537 96	28-301 127	36-320 59	46-004 29	73-501 7
03-533 51	23-031S 108	23-538 75	28-302 127	36-323 58	46-005 29	83-306 21
03-534 51	23-035L 109	23-541 95	28-303 127	36-324 58	46-006 29	83-307 21
03-535 53	23-035M 109	23-542 95	28-304 127	36-325 58	46-007 30	83-321 20
03-536 55	23-035S 109	23-543 95	28-305 127	36-326 58	46-008 30	83-329 20
03-537 53	23-035XL 109	23-544 95	28-415 126	36-327 57	46-009 30	83-330 20
03-539 55	23-035XXL 109	23-545 95	28-416 126	36-328 57	46-010 30	83-331 20
03-540 55	23-035XXXL .109	23-546 95	28-417 126	36-329 57	46-100 29	83-333 22
03-541 55	23-040 71	23-547 95	30-600111	36-352 59	46-101 30	83-337 22
03-542 56	23-041 71	23-548 95	30-602 111	36-353 59	46-102 30	88-102 41
03-543 56	23-042 71	23-561 82	30-640 111	36-354 59	46-103 30	88-105 41
03-544 56	23-043 71	23-562 82	30-642 111	36-373 59	46-104 30	88-106 42
03-546 55	23-044 71	23-563 82	30-683 111	36-374 59	46-109 30	88-107 42
03-547 55	23-045 71	23-564 82	30-685-4 111	36-375 59	46-203 31	88-108 42
03-549 55	23-04671	23-602 70	30-715 111	36-464	46-204 31	88-109 42
03-560 52	23-04771	23-607 69	30-716 111	36-466 27	46-206 31	88-120 44
03-561 52 03-562 52	23-048 71 23-049 71	23-608 69 23-609 69	30-718 111 30-719 111	36-468 27 36-470 28	46-207 31 46-900 31	88-121 44 88-122 44
03-563 52	23-050 71	23-610 69	30-719 111	36-480 60	46-901 31	88-123 44
03-564 52	23-050	23-611 70	30-728 112	36-481 60	69-461 48	88-125 43
03-565 52	23-052 72	23-612 70	30-732 112	36-482 60	70-001 26	88-126 43
04-175 15	23-053	23-613 70	30-733 112	38-182 119	70-004 26	88-127 43
04-442 13	23-054 72	23-614 69	30-746 112	38-183 119	71-002 37	88-128 43
04-443 13	23-05572	23-651 95	30-775 112	38-184 119	71-003 37	88-130 43
04-444 13	23-060 73	23-730 99	30-776 112	38-190 119	71-005 37	88-131 43
04-445 13	23-061 73	23-731 100	30-800 112	38-194 119	71-006 38	88-132 43
04-456 14	23-06273	23-732 100	31-010113	38-196 119	72-000 34	88-133 43
04-458 14	23-06373	23-733 100	31-115113	38-197 119	72-001 34	88-134 43
04-820 65	23-06473	23-734 100	31-116 113	38-198 119	72-002 34	88-135 43
04-880 62	23-101 70	23-735 101	31-117 113	38-199 119	72-007 36	88-201 46
04-951 15	23-103 70	23-736 101	31-120 113	38-0608 127	72-010 37	88-202 46
06-402 48	23-105 70	23-737 101	31-121 113	38-0707 49	72-013 37 72-020 34	88-203 47
06-860 66 06-865 48	23-115 73 23-141 75	23-738 101 23-739 102	31-122 113 31-813 113	38-0810127 38-101049	72-020 34	88-207 46 88-300 44
06-866 48	23-142 75	23-740 102	31-823 114	38-1012 127	72-022 34	88-301 44
06-867 48	23-142 75	23-740 102	33-640 61	38-1015 127	72-028 34	88-302 44
06-868 48	23-147 74	23-742 102	33-641 62	38-1216 127	72-029 36	88-334 40
09-201 20	23-148 74	23-743 103	33-643 61	38-1520 127	72-030 35	88-335 40
09-272 65	23-149 74	23-744 103	33-700 62	38-1824 127	72-031 35	88-336 40
09-273 65	23-153 74	23-904 92	33-703 62	38-2030 127	72-032 35	88-337 40
09-275 65	23-154 74	23-907 91	36-101 61	38-3050 127	72-033 35	88-402 46
09-276 18	23-155 74	23-908 91	36-102 61	43-10986	72-034 35	88-413 45
09-277 20	23-162 76	23-912 92	36-199116	43-111 86	72-035 35	88-415 45
18-600 126	23-163 76	23-914 87	36-200 116	43-112 83	72-036 35	88-416 45
18-601 126	23-171 76	23-920 87	36-201 116	43-114 84	72-045 36	88-417 45
18-602 126	23-172 76	23-922 88	36-202 116	43-115 85	72-046 36	88-500 45
18-603 126 18-604 126	23-176 99 23-202 76	23-923 88 23-924 88	36-210 8	43-118 85 43-123 85	72-047 36	88-502 45
18-604 126 18-605 126	23-254	23-924 88	36-212 8 36-218 116	43-123 85	72-048 36 72-049 36	88-900 40 AR-50CT 16
18-916 126	23-255	23-929 92	36-219 116	43-148 86	72-100 25	AR-504 16
19-012 34	23-263	23-930 92	36-220 116	43-148	72-100 25	AR-504 16
19-013 34	23-264	23-931 93	36-222 11	43-206 120	72-101 25	AR-505 16
19-014 34	23-280 78	23-932 93	36-223 11	43-216 123	72-103 25	AR-505IP 16
19-015 34	23-281 78	23-937 94	36-224 116	43-226 120	72-105 24	AR-506 16
19-020 34	23-282 78	23-938 94	36-250 10	43-300 123	72-106 24	AR-506IP16
19-401 31	23-285 79	23-949 89	36-251 12	43-305 122	72-107 25	AR-508 16
19-404 32	23-286 79	23-970 89	36-253 12	43-306 122	72-108 25	AR-508IP16
19-406 32	23-287 79	23-971 89	36-256 12	43-307 121	72-110 26	AR-50916
19-408 32	23-288 79	23-972 89	36-257 12	43-309 121	72-120 24	AR-HT50P15
19-409 32	23-290 80	23-973 90	36-258 12	43-313 123	72-121 24	E3-16S 15
19-410 32	23-291 79	23-974 90	36-259 12	43-314 123	72-122 24	E3-20S 15
19-411 32	23-292 79	23-975 90	36-261 12	43-318 122	72-123 24	E3-CA 14
19-412 32	23-293 79	23-976 90	36-263 12	43-319 122	72-124 24	E3-LS 14
19-413 32	23-294 79	23-977 91	36-266 12	43-320 121	72-125 24	E3-S 14
19-415 32 19-416 32	23-406 69 23-408 68	23-978 91 24-200 117	36-267 12 36-268 12	43-321 121 43-323 124	72-200 26 72-202 26	GE-50T 45 GE-100T 45
19-416 32	23-413 68	24-225 117	36-269 12	43-325 124	72-202 26	GE-1001 45
19-418 32	23-415 68	24-227 117	36-271 27	43-327 124	72-204 38	GL-130143
19-512 32	23-416 68	25-113 96	36-273 27	43-328 124	73-218 17	
22-402 28	23-417 68	25-114 96	36-274 10	43-393 125	73-222 16	

PRIMEGRIP ROOFING CATALOGUE 2023

22-403 28 | 23-418 68 | 25-116 96 | 36-275 28 | 43-815 125 | 73-223 16

NOTES



A DIVISION OF PRIMELINE TOOLS INC.

3170 Orlando Dr. Unit 1 Mississauga, ON Canada L4V 1R5

T: 905.671.4788 F: 905.672.5499 info@primelinetools.com PRIMELINETOOLS.COM



